



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H04L 29/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/38963</b> <b>(43) International Publication Date:</b> 5 December 1996 (05.12.96)
<b>(21) International Application Number:</b> PCT/US96/08498 <b>(22) International Filing Date:</b> 3 June 1996 (03.06.96) <b>(30) Priority Data:</b> 9511167.0 2 June 1995 (02.06.95) GB <b>(71) Applicant:</b> DSC COMMUNICATIONS CORPORATION [US/US]; 1000 Coit Road, Plano, TX 75075 (US). <b>(72) Inventors:</b> YEUNG, Joemanne, Chi, Cheung; 95A Bedford Road, Wootton, Beds MK43 9JB (GB). THOMPSON, Jonathan, Andrew; The Bothy, Elcot Park, Newbury, Buckinghamshire RG20 8NJ (GB). <b>(74) Agent:</b> FISH, Charles, S.; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> CONTROL MESSAGE TRANSMISSION IN TELECOMMUNICATIONS SYSTEMS		
<b>(57) Abstract</b>  Message packets for passing control information between a central telecommunications station and a controller for one or more telecommunications stations include: a packet header including a packet start pattern and a message size identifier for individually setting a message size for respective packets; a variable number of message records, each having a size relating to the message size selected for the packet; and a packet terminator including a unique packet end pattern invalid as an initial bit sequence for a message record. The tracking of transmissions is facilitated by the use of cyclical sequence numbers and an arrangement whereby up to a predetermined number of messages may be sent without an acknowledgement.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## CONTROL MESSAGE TRANSMISSION IN TELECOMMUNICATIONS SYSTEMS

The present invention relates to control message transmission in telecommunications systems. Particular aspects of the invention relate to a message  
5 packet transmitter and receiver, a message packet, a central telecommunications station and a controller for one or more telecommunications system(s).

In a telecommunications system where a central telecommunications station supports a plurality of subscribers and a controller is provided for controlling one or more such central telecommunications stations, it is necessary to pass control and  
10 other messages between the controller and the central telecommunications station. The messages should be handled in a reliable and efficient manner. It should also be possible to detect messages which are lost and to re-send those messages.

In accordance with an aspect of the invention, there is provided a message packet transmitter for generating message packets for passing control information  
15 between a central telecommunications station and a controller for one or more telecommunications stations, wherein the message packet transmitter generates packets of information comprising:

- a packet header including a packet start pattern and a message size identifier for individually setting a message size for respective packets;
- 20 a variable number of message records, each having a size determined by the message size selected for the packet; and
- a packet terminator including a packet end pattern invalid as an initial bit sequence for a message record.

The use of a packet terminator including a packet end pattern avoids the need  
25 to identify the total length of packets by indicating the number of bytes or the number of messages of a given size, for example. It provides a method of readily identifying the end of a packet and provides freedom as to the length of a packet. Also, by constraining all messages in the message packet to be of the same length, this avoids the need to indicate separately the length of each message record and/or to use a  
30 message record terminator for each message record. As a result of the combination of these features, a very low packet overhead is needed so that a high message data

rate can be achieved with a very small overhead for packet control information.

Preferably, the message size for the message packets is selectable from a predetermined plurality of fixed sizes (e.g., four). This also reduces the packet overhead as a low number of bits (e.g., two) are needed to define the message record sizes.

In one embodiment of the invention, the message records in the message packet comprise a fixed length message record header and a message field for a message, the message field having a size corresponding to the message size. In alternative embodiments, however, the message records could have a size corresponding to the message size.

Preferably, a message record is provided with a message control field including a message type identifier identifying the message record as a command message or a report message and/or an element address to which the message record refers. The message record can also be provided with a message identifier field for defining a function code for the message record and/or with a task identifier for associating message records.

A message packet sequence identifier can be added to each packet to facilitate the detection of errors in transmission and recovery from such errors. The message packet sequence identifier is preferably a number which is incremented modulo-n, where n is a whole number greater than 0, for successive packets.

In accordance with another aspect of the invention, there is provided a message packet transmitter for passing control information between a central telecommunications station and a controller for one or more telecommunications stations, the message packet transmitter being arranged to allocate message packet sequence identifiers to successive message packets, with the message packet sequence identifier being changed in accordance with a predetermined sequence for successive message packets, and to transmit up to a predetermined number of message packets to a message packet receiver, the predetermined number defining a sequence window, the message packet transmitter being responsive to the receipt of an acknowledgement including a message sequence identifier associated with message packet within the sequence window other than the last message packet of the window and to the absence

of receipt of an acknowledgement from the message packet receiver including the sequence identifier for the last message packet of the window within a predetermined period following the transmission of the last of message packet of the sequence window and to re-transmit the message packets subsequent to the message packet associated with message sequence identifier in the received acknowledgement.

Preferably, the message packet transmitter is responsive to the absence of any acknowledgement from the message packet receiver within a predetermined period following the transmission of the last message packet of the sequence window to retransmit all the message packets of the sequence window.

In accordance with a further aspect of the invention, there is provided a message packet receiver, wherein the message packet receiver comprises means responsive to the start pattern to identify a message packet header, means for extracting the message record size identifier for the message packet header and for receiving and routing the message records until the end pattern is recognised.

Preferably, a message packet receiver, on successful receipt of a message packet, returns to the message packet generator an acknowledgement including the packet sequence number of the message packet successfully received. This enables transmission errors to be readily identified.

In accordance with another aspect of the invention, there is provided a message packet receiver for a message packet system for passing control information between a central telecommunications station and a controller for one or more telecommunications stations in which a message packet transmitter is arranged to allocate message packet sequence identifiers to successive message packets with the message packet sequence identifier being changed in accordance with a predetermined sequence for successive message packets, the message packet receiver being arranged to track the message packet sequence identifiers for successive packets and to return an acknowledgement including the message packet sequence identifier for the last successfully received message packet when the predetermined sequence is broken or after a predetermined number of successfully received messages since the last acknowledgement was sent, the predetermined number defining a sequence window. The use of a sequence number window enables messages to be sent in an efficient

manner without having to wait for an acknowledgement of each message before sending the next message. In a real-time system such as a telecommunications system, it is important that messages can be routed rapidly without delays caused, for example, by a requirement to await an acknowledgement.

- 5            Preferably, the message packet receiver is responsive to receipt of a message packet with a message sequence identifier for a previous sequence window for which an acknowledgement has already been sent to retransmit the acknowledgement for the previous window.

- 10           Preferably, also, the message packet receiver is responsive to receipt of a message packet having a message packet sequence identifier which is out of sequence but does not relate to the previous sequence window or to a next sequence window to discard the message packet.

The invention also provides a message packet system comprising a message packet receiver and a message packet transmitter as defined above.

- 15           The invention further provides a controller for one or more central telecommunications stations, the controller comprising a message packet transmitter as defined above, for transmitting control information to a central telecommunications station, and/or a message packet receiver as defined above, for receiving control information from a central telecommunications station.

- 20           The invention also provides a central telecommunications station comprising a message packet receiver as defined above, for receiving control information from a controller for one or more central telecommunications stations, and/or a message packet transmitter as defined above, for transmitting control information to a controller for one or more central telecommunications stations.

- 25           The invention further includes a telecommunications system comprising a controller and one or more central telecommunications stations as defined above.

In accordance with another aspect of the invention, there is provided a method of passing control information between a central telecommunications station and a controller for one or more telecommunications stations, comprising:

- 30           generating a message packet having a packet header including a packet start pattern and a message size identifier for individually setting a message size for

respective packets, a variable number of message records, each having a size determined by the message size selected for the packet and a packet terminator including a packet end pattern invalid as an initial bit sequence for a message record; and

5 transmitting said message packet.

An embodiment of the invention will be described hereinafter, by way of example only, with reference to the accompanying drawings in which like reference signs are used for like features and in which:

Figure 1 is a schematic overview of an example of a wireless  
10 telecommunications system in which an example of the present invention is included;

Figure 2 is a schematic illustration of an example of a subscriber terminal of the telecommunications system of Figure 1;

Figure 3 is a schematic illustration of an example of a central terminal of the telecommunications system of Figure 1;

15 Figure 3A is a schematic illustration of a modem shelf of a central terminal of the telecommunications system of Figure 1;

Figure 4 is an illustration of an example of a frequency plan for the telecommunications system of Figure 1;

Figures 5A and 5B are schematic diagrams illustrating possible configurations  
20 for cells for the telecommunications system of Figure 1;

Figure 6 is a schematic diagram illustrating aspects of a code division multiplex system for the telecommunications system of Figure 1;

Figure 7 is a schematic diagram illustrating signal transmission processing stages for the telecommunications system of Figure 1;

25 Figure 8 is a schematic diagram illustrating signal reception processing stages for the telecommunications system of Figure 1;

Figure 9 is a schematic diagram illustrating in more detail the configuration of the modem shelf of Figure 3A;

Figure 10 is a schematic block diagram illustrating control protocols for the  
30 telecommunication system of Figure 1;

Figure 11 is a schematic block diagram illustrating message handling modules

for passing control messages between a site controller or element manager and a modern shelf controller in the telecommunication system of Figure 1;

Figure 12 is a schematic block diagram illustrating message packet construction for control messages in Figure 11;

5        Figure 13 is a message accumulation state diagram for a message handling module of Figure 11;

Figure 14 is a schematic diagram illustrating the different protocol levels for connection of a master to a slave for communication between a shelf controller and slave elements;

10        Figure 15 is a schematic diagram illustrating the establishment of connection of a master to a slave for communication between a shelf controller and slave elements;

Figure 16 is a schematic diagram illustrating the sending of a message from the shelf controller to a slave element;

15        Figure 17 is a schematic block diagram illustrating event handling by a shelf controller;

Figure 18 is a schematic block diagram illustrating control structures of a control terminal site controller;

20        Figure 19 is a schematic block diagram illustrating a configuration data base structure of a control terminal site controller; and

Figure 20 is a schematic representation of the connection of a simulator to the central terminal of Figure 3.

Figure 1 is a schematic overview of an example of a wireless telecommunications system. The telecommunications system includes one or more  
25    service areas 12, 14 and 16, each of which is served by a respective central terminal (CT) 10 which establishes a radio link with subscriber terminals (ST) 20 within the area concerned. The area which is covered by a central terminal 10 can vary. For example, in a rural area with a low density of subscribers, a service area 12 could cover an area with a radius of 15-20Km. A service area 14 in an urban environment  
30    where there is a high density of subscriber terminals 20 might only cover an area with a radius of the order of 100m. In a suburban area with an intermediate density



of subscriber terminals, a service area 16 might cover an area with a radius of the order of 1Km. It will be appreciated that the area covered by a particular central terminal 10 can be chosen to suit the local requirements of expected or actual subscriber density, local geographic considerations, etc, and is not limited to the examples illustrated in Figure 1. Moreover, the coverage need not be, and typically will not be circular in extent due to antenna design considerations, geographical factors, buildings and so on, which will affect the distribution of transmitted signals.

The central terminals 10 for respective service areas 12, 14, 16 can be connected to each other by means of links 13, 15 and 17 which interface, for example, with a public switched telephone network (PSTN) 18. The links can include conventional telecommunications technology using copper wires, optical fibres, satellites, microwaves, etc.

The wireless telecommunications system of Figure 1 is based on providing fixed microwave links between subscriber terminals 20 at fixed locations within a service area (e.g., 12, 14, 16) and the central terminal 10 for that service area. In a preferred embodiment each subscriber terminal 20 is provided with a permanent fixed access link to its central terminal 10. However, in alternative embodiments demand-based access could be provided, so that the number of subscribers which can be serviced exceeds the number of telecommunications links which can currently be active.

Figure 2 illustrates an example of a configuration for a subscriber terminal 20 for the telecommunications system of Figure 1. Figure 2 includes a schematic representation of customer premises 22. A customer radio unit (CRU) 24 is mounted on the customer's premises. The customer radio unit 24 includes a flat panel antenna or the like 23. The customer radio unit is mounted at a location on the customer's premises, or on a mast, etc., and in an orientation such that the flat panel antenna 23 within the customer radio unit 24 faces in the direction 26 of the central terminal 10 for the service area in which the customer radio unit 24 is located.

The customer radio unit 24 is connected via a drop line 28 to a power supply unit (PSU) 30 within the customer's premises. The power supply unit 30 is connected to the local power supply for providing power to the customer radio unit

24 and a network terminal unit (NTU) 32. The customer radio unit 24 is also connected to via the power supply unit 30 to the network terminal unit 32, which in turn is connected to telecommunications equipment in the customer's premises, for example to one or more telephones 34, facsimile machines 36 and computers 38. The telecommunications equipment is represented as being within a single customer's premises. However, this need not be the case, as the subscriber terminal 20 preferably supports either a single or a dual line, so that two subscriber lines could be supported by a single subscriber terminal 20. The subscriber terminal 20 can also be arranged to support analogue and digital telecommunications, for example analogue communications at 16, 32 or 64kbits/sec or digital communications in accordance with the ISDN BRA standard.

Figure 3 is a schematic illustration of an example of a central terminal of the telecommunications system of Figure 1. The common equipment rack 40 comprises a number of equipment shelves 42, 44, 46, including a RF Combiner and power amp shelf (RFC) 42, a Power Supply shelf (PS) 44 and a number of (in this example four) Modem Shelves (MS) 46. The RF combiner shelf 42 allows the four modem shelves 46 to operate in parallel. It combines and amplifies the power of four transmit signals, each from a respective one of the four modem shelves, and amplifies and splits received signals four way so that separate signals may be passed to the respective modem shelves. The power supply shelf 44 provides a connection to the local power supply and fusing for the various components in the common equipment rack 40. A bidirectional connection extends between the RF combiner shelf 42 and the main central terminal antenna 52, typically an omnidirectional antenna, mounted on a central terminal mast 50.

This example of a central terminal 10 is connected via a point-to-point microwave link to a location where an interface to the public switched telephone network 18, shown schematically in Figure 1, is made. As mentioned above, other types of connections (e.g., copper wires or optical fibres) can be used to link the central terminal 10 to the public switched telephone network 18. In this example the modem shelves are connected via lines 47 to a microwave terminal (MT) 48. A microwave link 49 extends from the microwave terminal 48 to a point-to-point

microwave antenna 54 mounted on the mast 50 for a host connection to the public switched telephone network 18.

A personal computer, workstation or the like can be provided as a site controller (SC) 56 for supporting the central terminal 10. The site controller 56 can be connected to each modem shelf of the central terminal 10 via, for example, RS232 connections 55. The site controller 56 can then provide support functions such as the localisation of faults, alarms and status and the configuring of the central terminal 10. A site controller 56 will typically support a single central terminal 10, although a plurality of site controllers 56 could be networked for supporting a plurality of central terminals 10.

As an alternative to the RS232 connections 55, which extend to a site controller 56, data connections such as an X.25 links 57 (shown with dashed lines in Figure 3) could instead be provided from a pad 228 to a switching node 60 of an element manager (EM) 58. An element manager 58 can support a number of distributed central terminals 10 connected by respective connections to the switching node 60. The element manager 58 enables a potentially large number (e.g., up to, or more than 1000) of central terminals 10 to be integrated into a management network. The element manager 58 is based around a powerful workstation 62 and can include a number of computer terminals 64 for network engineers and control personnel.

Figure 3A illustrates various parts of a modem shelf 46. A transmit/receive RF unit (RFU - for example implemented on a card in the modem shelf) 66 generates the modulated transmit RF signals at medium power levels and recovers and amplifies the baseband RF signals for the subscriber terminals. The RF unit 66 is connected to an analogue card (AN) 68 which performs A-D/D-A conversions, baseband filtering and the vector summation of 15 transmitted signals from the modem cards (MCs) 70. The analogue unit 68 is connected to a number of (typically 1-8) modem cards 70. The modem cards perform the baseband signal processing of the transmit and receive signals to/from the subscriber terminals 20. This includes 1/2 rate convolution coding and x 16 spreading with CDMA codes on the transmit signals, and synchronisation recovery, de-spreading and error correction on the receive

signals. Each modem card 70 in the present example has two modems, each modem supporting one subscriber link (or two lines) to a subscriber terminal 20. Thus, with two modems per card and 8 modems per modem shelf, each modem shelf could support 16 possible subscriber links. However, in order to incorporate redundancy  
5 so that a modem may be substituted in a subscriber link when a fault occurs, only up to 15 subscriber links are preferably supported by a single modem shelf 46. The 16th modem is then used as a spare which can be switched in if a failure of one of the other 15 modems occurs. The modem cards 70 are connected to the tributary unit (TU) 74 which terminates the connection to the host public switched telephone  
10 network 18 (e.g., via one of the lines 47) and handles the signalling of telephony information to, for example, up to 15 subscriber terminals (each via a respective one of 15 of the 16 modems).

The wireless telecommunications between a central terminal 10 and the subscriber terminals 20 could operate on various frequencies. Figure 4 illustrates one  
15 possible example of the frequencies which could be used. In the present example, the wireless telecommunication system is intended to operate in the 1.5-2.5GHz Band. In particular the present example is intended to operate in the Band defined by ITU-R (CCIR) Recommendation F.701 (2025-2110MHz, 2200-2290MHz). Figure 4 illustrates the frequencies used for the uplink from the subscriber terminals 20 to the  
20 central terminal 10 and for the downlink from the central terminal 10 to the subscriber terminals 20. It will be noted that 12 uplink and 12 downlink radio channels of 3.5MHz each are provided centred about 2155MHz. The spacing between the receive and transmit channels exceeds the required minimum spacing of 70MHz.

25 In the present example, as mentioned above, each modem shelf will support 1 frequency channel (i.e. one uplink frequency plus the corresponding downlink frequency). Up to 15 subscriber links may be supported on one frequency channel, as will be explained later. Thus, in the present embodiment, each central terminal 10 can support 60 links, or 120 lines.

30 Typically, the radio traffic from a particular central terminal 10 will extend into the area covered by a neighbouring central terminal 10. To avoid, or at least

to reduce interference problems caused by adjoining areas, only a limited number of the available frequencies will be used by any given central terminal 10.

Figure 5A illustrates one cellular type arrangement of the frequencies to mitigate interference problems between adjacent central terminals 10. In the arrangement illustrated in Figure 5A, the hatch lines for the cells 76 illustrate a frequency set (FS) for the cells. By selecting three frequency sets (e.g., where: FS1 = F1, F4, F7, F10; FS2 = F2, F5, F8, F11; FS3 = F3, F6, F9, F12), and arranging that immediately adjacent cells do not use the same frequency set (see, for example, the arrangement shown in Figure 5A), it is possible to provide an array of fixed assignment omnidirectional cells where interference between nearby cells can be avoided. The transmitter power of each central terminal 10 is set such that transmissions do not extend as far as the nearest cell which is using the same frequency set. Thus each central terminal 10 can use the four frequency pairs (for the uplink and downlink, respectively) within its cell, each modem shelf in the central terminal 10 being associated with a respective RF channel (channel frequency pair).

With each modem shelf supporting one channel frequency (with 15 subscriber links per channel frequency) and four modem shelves, each central terminal 10 will support 60 subscriber links (i.e., 120 lines). The 10 cell arrangement in Figure 5A can therefore support up to 600 ISDN links or 1200 analogue lines, for example. Figure 5B illustrates a cellular type arrangement employing sectorized cells to mitigate problems between adjacent central terminals 10. As with Figure 5A, the different type of hatch lines in Figure 5B illustrate different frequency sets. As in Figure 5A, Figure 5B represents three frequency sets (e.g., where: FS1 = F1, F4, F7, F10; FS2 = F2, F5, F8, F11; FS3 = F3, F6, F9, F12). However, in Figure 5B the cells are sectorized by using a sectorized central terminal (SCT) 13 which includes three central terminals 10, one for each sector S1, S2 and S3, with the transmissions for each of the three central terminals 10 being directed to the appropriate sector among S1, S2 and S3. This enables the number of subscribers per cell to be increased three fold, while still providing permanent fixed access for each subscriber terminal 20.

A seven cell repeat pattern is used such that for a cell operating on a given frequency, all six adjacent cells operating on the same frequency are allowed unique

PN codes. This prevents adjacent cells from inadvertently decoding data.

As mentioned above, each channel frequency can support 15 subscriber links. In this example, this is achieved using by multiplexing signals using a Code Division Multiplexed Access (CDMA) technique. Figure 6 gives a schematic overview of  
5 CDMA encoding and decoding.

In order to encode a CDMA signal, base band signals, for example the user signals for each respective subscriber link, are encoded at 80-80N into a 160ksymbols/sec baseband signal where each symbol represents 2 data bits (see, for example the signal represented at 81). This signal is then spread by a factor of 16  
10 using a respective Walsh pseudo random noise (PN) code spreading function 82-82N to generate signals at an effective chip rate of 2.56Msymbols/sec in 3.5MHz. The signals for respective subscriber links are then combined and converted to radio frequency (RF) to give multiple user channel signals (e.g., 85) for transmission from the transmitting antenna 86.

15 During transmission, a transmitted signal will be subjected to interference sources 88, including external interference 89 and interference from other channels 90. Accordingly, by the time the CDMA signal is received at the receiving antenna 91, the multiple user channel signals may be distorted as is represented at 93.

In order to decode the signals for a given subscriber link from the received  
20 multiple user channel, a Walsh correlator 94-94N uses the same pseudo random noise (PN) code that was used for the encoding for each subscriber link to extract a signal (e.g, as represented at 95) for the respective received baseband signal 96-96N. It will be noted that the received signal will include some residual noise. However, unwanted noise can be removed using a low pass filter.

25 The key to CDMA is the application of orthogonal codes that allow the multiple user signals to be transmitted and received on the same frequency at the same time. To avoid the noise floor rising during spreading of the signals using PN codes as the number of user signals increases, Rademacher-Walsh codes are used to encode the spread user signals. Once the bit stream is orthogonally isolated using the  
30 Walsh codes, the signals for respective subscriber links do not interfere with each other.

Walsh codes are a mathematical set of sequences that have the function of "orthonormality". In other words, if any Walsh code is multiplied by any other Walsh code, the results are zero.

The following example will illustrate this using a four bit spreading code for ease of illustration, rather than the 16 bit spreading code preferred in practice.

Incoming User Bit Stream	PN Code Spreading (x4)	Application of Walsh Codes	Transmit Code
10 '1'	1011	0000	0000
'0'	1010	1100	1000
			0010
15 '1'	0110	1010	0100
'1'	0111	1001	1110

Figure 7 is a schematic diagram illustrating signal transmission processing stages as configured in a subscriber terminal 20 in the telecommunications system of Figure 1. The central terminal is also configured to perform equivalent signal transmission processing. In Figure 7, an analogue signal from one of a pair of telephones is passed via a two-wire interface 102 to a hybrid audio processing circuit 104 and then via a codec 106 to produce a digital signal into which an overhead channel including control information is inserted at 108. The resulting signal is processed by a convolutional encoder 110 before being passed to a spreader 116 to which the Radermacher-Walsh and PN codes are applied by a RW code generator 112 and PN Code generator 114, respectively. The resulting signals are passed via a digital to analogue converter 118. The digital to analogue converter 118 shapes the digital samples into an analogue waveform and provides a stage of baseband power control. The signals are then passed to a low pass filter 120 to be modulated in a

modulator 122. The modulated signal from the modulator 122 is mixed with a signal generated by a voltage controlled oscillator 126 which is responsive to a synthesizer 160. The output of the mixer 128 is then amplified in a low noise amplifier 130 before being passed via a band pass filter 132. The output of the band pass filter 132 is further amplified in a further low noise amplifier 134, before being passed to power control circuitry 136. The output of the power control circuitry is further amplified in a further low noise amplifier 138 before being passed via a further band pass filter 140 and transmitted from the transmission antenna 142.

Figure 8 is a schematic diagram illustrating the equivalent signal reception processing stages as configured in a subscriber terminal 20 in the telecommunications system of Figure 1. The central terminal is also configured to perform equivalent signal reception processing. In Figure 8, signals received at a receiving antenna 150 are passed via a band pass filter 152 before being amplified in a low noise amplifier 154. The output of the amplifier 154 is then passed via a further band pass filter 156 before being further amplified by a further low noise amplifier 158. The output of the amplifier 158 is then passed to a mixer 164 where it is mixed with a signal generated by a voltage controlled oscillator 162 which is responsive to a synthesizer 160. The output of the mixer 164 is then passed via the de-modulator 166 and a low pass filter 168 before being passed to an analogue to digital converter 170. The digital output of the A/D converter 170 is then passed to a correlator 178, to which the same Radermacher-Walsh and PN codes used during transmission are applied by a RW code generator 172 (corresponding to the RW code generator 112) and a PN code generator 174 (corresponding to PN code generator 114), respectively. The output of the correlator is applied to a Viterbi decoder 180. The output of the Viterbi decoder 180 is then passed to an overhead extractor 182 for extracting the overhead channel information. The output of the overhead extractor 182 is then passed via a codec 184 and a hybrid circuit 188 to a two wire interface 190 where the resulting analogue signals are passed to a selected telephone 192.

Figure 9 is a schematic diagram illustrating in more detail the configuration of one of the modem shelves 46. The shelf controller 72 manages the operation of the whole of the modem shelf and its daughter network sub-elements (NSEs). The



shelf controller (SC) 72 is provided with a RS232 serial port 59 for connection to a site controller or to a pad for connection to a data network such as an X.25 data network. The shelf controller communicates control and data information via a backplane asynchronous bus 212 directly with the analogue card (AN) 68, the tributary unit card (TU) 74 and the modem cards (MC) 70. Other network sub-elements are connected via the modem cards. In a fully populated rack there will be four shelf controllers, one on each modem shelf. These four shelf controllers are configured to share the control of network service elements on other cards in the rack. The network service elements on the RF combiner shelf 42 are connected to the shelf controller backplane bus on each of the modem shelves. The shelf controller includes a master communications interface 73 for performing the communications functions mentioned above and other control functions. Each of the tributary card 74, the analogue card 68 and each modem card 70 includes a respective slave communications interface 74, 69 and 71, which manages the communications with the shelf controller 72. The RF card 66 is controlled from the analogue card 68, which is configured to provide the necessary control functions via the control path 222.

Also shown in Figure 9 are the signal paths from an interface to the public switched telephone network (e.g via lines 47 in Figure 3) and the interface to an RF combiner shelf 42.

The tributary unit 74 terminates the connection to the host public switched telephone network and handles the processing of telephony information for up to 15 subscriber terminals (up to 30 calls). The tributary unit 74 is 'on-line' in that it directly processes calls. The tributary unit 74 is also connected to a 2Mb/s time-multiplexed (timeslot) transmit bus 214 and 2Mb/s time-multiplexed (timeslot) receive bus 216 for transmit and receive calls, respectively.

The modems (1-15) on the modem cards 70 perform baseband signal processing of the transmit and receive signals including the convolution coding and spreading functions on the transmit signals, and the synchronisation recovery, de-spreading and error correction functions on the receive signals, as described earlier. Each modem is connected to the tributary unit 74 via the transmit and receive buses

214 and 216, and to the analogue card 68 via a dedicated connection 220 to one of a number of ports on the analogue card and via a digital CDMA RCV bus 218. Each of these dedicated connections includes multiplexed I, Q and control transmit paths.

The analogue card 68 performs A-D/D-A conversions, baseband filtering and  
5 vector summation of the 15 transmit signals from the modem cards. The analogue card 68 also scales the transmit signal power level according to high or low power levels. It is connected to the modem cards via the dedicated connections 220 and the digital CDMA RCV bus 218.

The RF card 66 generates the modulated transmit RF signals (at medium  
10 power level) and recovers and amplifies the baseband RF signal from the subscriber terminals 20. The RF card is 'on-line' in that it passes up to 30 calls simultaneously via the 15 available links, all on the same RF carrier. The RF card is connected to the analogue card via transmit and receive paths 226 and 224, respectively. The RF card is also connected to power amplifiers of the RF combiner shelf on the transmit  
15 side and to a low noise amplifier on the receive side. The power amplifiers (not shown) in the RF combiner shelf amplify the medium power output of the RF card 66 to an appropriate transmit power plus an amount to cover losses during signal combination and in the antenna feeder cable for the transmit signal. The low noise amplifier (not shown) is a low signal amplifier for overcoming losses in the antenna  
20 feeder etc. for the receive signal. The transmit carrier modulation is performed by the RF card 66 using an 'IQ modulator' at intermediate frequency and a single conversion to RF. The receive output of the RF card is at baseband in 'IQ' format as per the transmit input to the RF card.

Figure 10 is a schematic block diagram illustrating an example of various  
25 control protocols used for the transmission of control information between different parts of an example of a telecommunications system in accordance with the invention. It should be noted that Figure 10 is directed to the control signal paths, and accordingly, the telephone call signal paths are not included. Many of the features of Figure 10 have already been described above, and in this case the same reference  
30 numerals are used as before. Accordingly, these features will not be described again in detail.

A first protocol, called the Sub-system Management Processor (SMP) protocol, is used for communications between the shelf controller 72 and a site controller 56, or element manager 58, via lines 59 and 55, or 59 and 57, respectively. The first protocol is a balanced protocol with either party to a communication being  
5 able to initiate an exchange of information. The first protocol and the types of message which can be sent will be described in more detail below. As mentioned above, the shelf controller 72 is provided with an RS232 serial output for connection to a site controller 56. Accordingly, if a connection is provided instead to an element controller 62, represented schematically by the switch 227, a pad 228 for connection  
10 to an X.25 line, or the like, is used to convert between RS232 format and X.25 format.

A second protocol, called the Radio Link Termination (RLT) protocol, is used for passing control and data information via the control 212 and data 213 buses on the modem shelf. In addition, it should be noted that the same protocol is valid on  
15 the radio link 226 between the antenna 52 of the central terminal and the subscriber terminal(s) 20.

The second protocol is an unbalanced protocol with the microprocessor 73 in the shelf controller 72 acting as a busmaster (M) and the microcontrollers 69, 71 and 75 on the analogue card 68, the modem cards 70 and the tributary unit 74 acting as  
20 slaves.

The first protocol and the message structure will now be described in more detail.

The first protocol is used for information exchange in both directions between the site controller 56, or element controller 58 if connected instead, and a selected  
25 modem shelf controller 73. In the following description of the first protocol, the term management processor will be used for ease of reference to be either a site controller or an element manager, as the first message protocol is the same whether a site controller 56 is connected to a shelf controller 72 via an RS232 link 55, or an element manager 58 is connected to a shelf controller via an X.25 link 57 and the pad 228.

30 On initially establishing a connection between the management processor and the shelf controller, and preferably also at intervals during operation, an

authentication process is undertaken. The authentication process is advantageous to stop potential intruders from extracting, distorting and corrupting the information within the telecommunications system. The details of the authentication process do not form part of the instant invention and will therefore not be described herein.

- 5 However, it will be appreciated that any number of conventional authentication processes could be employed using the identities (e.g., serial numbers) of various components, transaction numbers, etc.

When it is desired to establish a communication, a call set up sequence is employed. An example of a call set up procedure where an management processor (MP) initiates a call to a shelf controller (SC) includes:

10 (MP) initiates a call to a shelf controller (SC) includes:

MP Action/Response		SC Action/Response
Set up call using SC address	-->	Wait
Detect call setup	<--	Set up call using MP address
15 Check received MP address		
Drop call if incorrect		
Send 'authentication' message	-->	Validate 'authentication' message
		Send 'authentication reply' with SC data and result of validation
20 Check validation result and SC information. Drop call if information check is false	<--	Drop call if validation false

The first protocol is message based. Individual messages tend to be relatively short and are blocked for transmission within message packets. Each such packet, which is variable in length, can carry one or more messages, all of which must be the same size. The maximum packet size, excluding the packet header, is chosen in the present example to be 260 bytes. With the 260 byte maximum packet length, the packet may contain either one 256 byte message, thirteen 16 byte messages, thirty-two 4 byte messages or fifty-two 1 byte messages.

25

30

A packet consists of the following fields:

	SOP	Start of Packet	3 bytes
	CTRL	Control Byte	1 byte
	Messages		variable
5	EOP	End of Packet	3 bytes
	CRC	Cyclic Redundancy Check	2 bytes

The purpose of the fields SOP, CTRL, EOP and CRC will now be explained in more detail.

#### 10 SOP

This defines the start of a packet and is represented by 3 unique bytes, 'AA' hex followed by 'EE' hex followed by 'AA' hex (i.e., in binary 1010 1010 1110 1110 1010 1010). It will be noted that for each nibble the MSB is 1 and the LSB is 0.

#### CTRL

15 This defines the controls for the packet. The first two bits define the message size for the packet. The four possible sizes are as follows:

	Type 1	'0 0'	1 byte
	Type 2	'0 1'	4 bytes
20	Type 3	'1 0'	16 bytes
	Type 4	'1 1'	256 bytes

25 The third bit defines the packet direction: '0' is from the management processor to the shelf controller and '1' from the shelf controller to the management processor.

30 The last five bits are used to identify a packet sequence number (PSN). The packet sequence number represents a window used for flow control. The sender may send a number of packets, up to the window size (or a smaller number (e.g., five) if this is pre-arranged before a packet exchange), before receiving a packet acknowledgement from the receiver. The acknowledgement advances the window and allows the sender to overwrite the packets acknowledged.

A packet (PSN = n) received out of sequence, or with an error after application of the CRC, leads to an acknowledgement for packet sequence number (n-1). The acknowledgement packet indicates whether a CRC error was found. All packets after the acknowledged one then have to be retransmitted to avoid the complication of selective re-transmission.

From the values 0...31 which can be accommodated within the five bit sequence number, the value 0 is reserved for sequence number re-synchronisation (to be described later) so that the normal sequence numbers are 1, 2, 3,...30, 31, 1, 2....

A maximum number of outstanding acknowledgement packets is defined as a number which must be less than half the number of valid sequence numbers. For purposes of illustration only, in examples to be described below, a window size of five is assumed. The receiver is arranged to recognise the concept of the 'previous' window (the last window length's worth of message packets from the current expected sequence number) and the 'next' window (the next window length's worth of message packets).

Acknowledgement packets do not have a sequence number as such, rather the sequence number field will always be set at zero, and are always sent singly (i.e., they are not packaged with other messages). Acknowledgement packets are not acknowledged themselves and are not subject to the window limit, they can be sent at any time.

The immediate re-transmission of packets may be requested by setting the top bit of the packet acknowledgement data byte. This causes any remaining unacknowledged packets to be immediately re-transmitted rather than waiting for a time-out. The meaning of the rest of the acknowledgement remains unchanged.

After start-up and sometimes during operation, it is necessary to re-synchronise the sequence numbers between the sender and the receiver. The special sequence number 0 is used for this purpose. The reception of the 0 sequence number resets the expected sequence number variable of the receiver. After the reset, it is no longer valid for packets from the previous window to be received until after the first acknowledgement has been sent.

The two message flow directions are completely independent. The state of the

message flow from the management processor to the shelf controller is not allowed to affect the flow of messages in the other direction, and vice versa.

In the following, a number of examples of packet flow between a sender and receiver are illustrated. In the examples, a window size of five is chosen. This  
 5 means that up to five packets may be sent without an acknowledgement. The receiver need not wait until five packets have been received, but can send an acknowledgement when it is convenient.

In the packet flow examples set out below, the sender is shown in the left column, the receiver in the right column. The arrows indicate the direction of packet flow.

10

#### Example 1.

Normal state (acknowledgement after five packets).

6	-->	
7	-->	
15 8	-->	
9	-->	
10 10	-->	
	<--	10

#### 20 Example 2

A packet (not the first after an acknowledgement) is lost. The receiver acknowledges up to the packet before the missing one and packets after the missing one are discarded. The sender re-sends the remaining packets after a timeout. The receiver can then send the acknowledgement on recognising the missing packet.

25

6	-->	
7	-->	
8	-	
9	-->	ignored
30 10	-->	ignored
	<--	7

Timeout...

```

8          -->
9          -->
10         -->
5          <--          10

```

### Example 3

The first packet after an acknowledgement is lost. In this case the receiver does not send an acknowledgement but waits for the packets to be re-sent in due course.

```

6          -|
7          -->          ignored
8          -->          ignored
15 9          -->          ignored
10 10         -->          ignored

```

Timeout...

```

6          -->
7          -->
20 8          -->
9          -->
10 10         -->
          <--          10

```

### 25 Example 4

An acknowledgement is lost. In this case the receiver will get packets from the previous window which it had tried to acknowledge. The response is to resend the previous acknowledgement as soon as a packet from the previous window is received. It is possible that a plurality of acknowledgements will be sent as transmission is not instantaneous. The sender accounts for this and discards

30 acknowledgements for packets for which acknowledgements have already been



received.

```

6          -->
7          -->
5  8          -->
9          -->
10         -->
          | -          10
Timeout...
10  6          -->
          < -          10

```

#### Example 5

A spurious packet is received, which is neither from the previous nor the next  
 15 window. The receiver ignores the packet. It may be due to corruption, in which  
 case the packet will be treated as lost and one of the above scenarios will come into  
 play. It may also be due to a loss of synchronisation. If this is the case, the sender  
 will detect this due to lack of acknowledgements and will then retransmit all the  
 outstanding packets starting with the special sequence number 0.

```

20
7          -->
8          -->
9          -->
10         -->
25         < -          10
5          -->          ignore

```

#### EOP

This defines the end of the packet and is represented by three unique bytes,  
 30 'EE' hex followed by 'AA' hex followed by 'EE' hex (i.e., in binary 1110 1110 1010  
 1010 1110 1110). The initial combination of bytes of the end of packet sequence

should start with a byte sequence which is invalid for data in the message fields. It will be noted that for each nibble the MSB is 1 and the LSB is 0.

The use of the end of packet field avoids the need to identify the total length of packets by indicating the number of bytes or the number of messages of a given size, for example.

#### CRC

This is used to detect errors in both the packet header and the messages. A CRC error leads to the transmission of an acknowledgement for the last packet correctly received.

10       The structure of the message records will now be described in more detail. Each message record consists of a four byte header followed by the message data field.

The message header consists of: a message control byte; a sub-address byte; a message ID byte; and a task reference number byte.

15       One bit in the message control byte (e.g., the MSB) defines the type of message (e.g., '1' for command, '0' for report) and is used in combination with the message ID to define the message processing required. The remaining 7 bits of the message control byte define an element address to which the message refers (e.g, the address of a modem to which a message is directed).

20       The sub-address byte is a sub-address field within the element addressed by the message control byte.

The message ID byte defines the identity (equivalent to a command code) of the message.

25       The transaction identifier byte can be used to match up commands to a shelf controller with replies from it.

For any message capable of exceeding 256 bytes, the first byte of the data field contains a message sequence number (MSN) which is set to zero for each new message sent and is incremented for each 256-byte fragment (i.e. packet sending that message). The first data byte also contains a 'more' bit to indicate that the current package is not the last one for that message. The bit is set to zero for the last message fragment sent. If such a message is received out of sequence, the receiver

30

sends a packet acknowledgement for the last packet correctly received. The sender will then resend all packets following the one which has been acknowledged.

All reports relating to specific events will be sent with an event sequence number (ESN) to distinguish them from other events. An event clear message can  
5 be used to identify an event to be cleared.

The length of the data field for a message is given in the packet control byte. All messages in a packet have the same length. In the present example the data field can be 1, 4, 16 or 156 bytes in length.

Figure 11 is a schematic block diagram illustrating the architecture of the  
10 message handling modules which are provided in the management processor and the shelf controller for constructing, sending and receiving messages.

The message handling modules are described with reference to Figure 11 for the situation where they are located in a shelf controller, which is communicating with an element controller via an X.28 format line to a pad and from there to the  
15 element controller via an X.25 format line. The same structure is used where there is an RS232 connection (i.e., an X.28 format line) directly to a site controller. Similarly, the same basic structure is employed in a site controller or element controller at the other end of the line. The processes performed in the message handling modules can be implemented on suitable processing hardware including, as  
20 appropriate, one or more microprocessors and/or special purpose hardware.

The message handling modules, and consequently the protocol can be thought of as having a plurality of different layers. The layers A-E illustrated in Figure 11 form part of a layer 2 protocol.

In Figure 11, layer E 244 is responsible for transmitting and receiving strings  
25 of characters representing messages to and from the transmission link. The transmitter is responsible for duplicating characters in message packets. The receiver contains a state machine that assembles incoming characters into messages. This layer performs particular functions, which are: initialise the layer, transmit a message, receive a message and accumulate messages. The last of these functions is  
30 responsible for accumulating bytes into messages. It handles both communications with the pad and command messages as well as message packets. Bytes that cannot

be fitted into a message are discarded.

Figure 13 is a state diagram illustrating the process of accumulating bytes into packets in layer E.

In state 262 the process idles waiting for an input byte.

5        In state 262, if a received byte is a printable character, then control passes via 280 to state 290 where the process waits for a service signal.

      In state 290, if a printable byte is received, then this is stored and control loops at 291. In state 290, if another control character is received, then all bytes are discarded and control passes via 292 to state 262. In state 291, if a carriage return  
10       or line feed byte is received, then this is discarded and a pad message is processed and control passes via 293 to state 262.

      In state 262, if a received byte is a start of packet byte, then the byte is stored and control passes via 264 to state 265. In state 262, if a received byte is anything other than a start of packet byte or a printable character, the byte is discarded and  
15       control loops at 263.

      In state 265, if a first header byte is received, then the byte is stored and control passes via 266 to state 268. In state 265, if any other byte is received, the all bytes are discarded and control passes via 267 back to state 262.

      In state 268, if a second header byte is received, then the byte is stored and  
20       control passes via 269 to state 271. In state 268, if any other byte is received, the all bytes are discarded and control passes via 270 back to state 262.

      In state 271, any byte received is stored, a message length is calculated, a new message condition is started and control passes to state 273.

      In state 273, if a received byte does not complete a record, the byte is stored  
25       and control loops at 274. In state 273, if a received byte completes a record but no end of packet is received, then a new message record is started and control loops at 275. In state 273, if a received byte completes a record and an end of packet byte is received, then the byte is stored and control passes via 276 to state 277. In state 277, if a received byte does not complete a packet trailer, then the byte is stored and  
30       control loops at 278. If a received byte does complete a packet trailer, then the byte is stored and control passes via 279 to state 262. This completes the description of

the state diagram of Figure 13.

Returning to Figure 11, layer D 242 is a layer which provides message composition/decomposition for messages in accordance with the X.28 format. Message packets are passed through this layer unchanged. This layer performs the following functions to provide encoding and decoding of pad to the X.28 standard. The functions are: send a wake-up string to the pad; send a message packet to the pad; decode an incoming pad message; send initialisation messages to the pad; send a call message to the pad; send a clear message to the pad; send a parameter request message to the pad to probe whether it is still there; and receive an incoming message packet.

Layer C 240 provides for call control. This layer maintains the connection with the transmission link (e.g., the pad 228) and makes network calls when message packet output is required. It also is responsible for breaking calls when they idle for too long. This layer performs the following functions to maintain the serial connection to the pad and to maintain the call through the X.25 network, namely: initialise the layer; perform background processing; respond to a call from layer D when a disconnect is detected; respond to a call by layer D when a connect is detected; respond to a call by layer D when a pad prompt is received; instruct the layer to create a connection with the management processor; send an application packet; respond to a call by layer D when communication with the pad is lost; receive an incoming message packet; and respond to a call by layer D to indicate receipt of the pad probe response.

The background processing function has the following tasks:

- If the connection with the pad is down, a wake-up string is sent to the pad once per second until a pad prompt is received, this then triggers the initialisation of the pad.
- If a call to the management processor is required and one is not currently in progress, a call is placed with the pad.
- Every twenty seconds, if the pad is recorded as being connected, a probe message is sent to the pad including a request for the state of a pad parameter. If a response to this is not received within a ten second time-out period, the pad is assumed to be disconnected.

Layer B 236 provides functions for performing the exchange of authentication messages between the shelf controller and the management processor whenever a call is connected. The functions are: initialise the layer; request the creation of an authenticated link with the management processor; respond to call by layer C when a call is connected; respond to a call by layer 3 when an authentication message is received; respond to a call by layer C when a call is disconnected; send a message packet; and receive a message packet.

The level 2 composer 238 provides encoding functions for authentication messages. The functions are: encode a shelf controller ID (SC ID) message; encode an 'authentication reply' message; and encode a 'packet acknowledgement' message.

Layer A 234 provides programming interface functions to layer 3 of the protocol stack. The functions are: initialise the layer; return TRUE if the layer can accept an output message; send an application packet; respond to call by layer B when a link is established; and receive a message packet.

The packet constructor 232 collects messages into packets for transmission and handles the re-transmission of packets in case of failure.

The record composers 230 are a series of modules which provide a layer between the encoded form of a message and the information which the message represents. These record composers actually form part of other subsystems that generate SMP messages and are only shown here to put the message handling modules into context.

The message class identifier 246 takes incoming packets and breaks them into their component messages (message records). Each message (message record) is then passed to an appropriate decoder module. This module is also arranged to track sequence numbers of received packets and generate appropriate acknowledgements. To do this it maintains in storage a list of received sequence numbers and the current window boundaries. Logic (typically implemented in software) then tracks the sequence numbers and interprets the sequences as described above to determine when to send an acknowledgement and what to send.

The packet constructor and the message class identifier form part of the layer 3 protocol.

Figure 12 illustrates the packet constructor module 232 in more detail. The data records for messages are assembled into packets by this packet constructor module. Incoming records at 248 are sorted into one of the four packet construction buffers 250 according to the data field size. Separate buffers 252, 254, 256 and 258 are provided for 1 byte, 4 byte, 16 byte and 156 byte data fields, respectively. When a buffer is full or in response to a predetermined transmit instruction, for example after a predetermined time has elapsed, the content of a buffer is sent over the transmission link and also copied to slot in a retry buffer 260 corresponding to the packet sequence number. There is one slot in the retry buffer for each sequence number. The retry buffer entry is cleared if an acknowledgement is received. If a retry instruction is received, the failed packet is re-transmitted directly from the retry buffer. If the retry buffer entry is not available to receive a packet from the packet construction buffers 150, or the number of packets awaiting transmission exceeds the size of the window, then the transfer and transmission is not performed. In this case, further requests to add message records are rejected until space becomes available. If a packet is not acknowledged within an acknowledgement timeout period, the packet is re-sent.

In this embodiment, the construction buffers 252, 254, 256 and 258 become full when they contain eighty-six 1 byte records, forty-three 4 byte records, fourteen 16 byte records or one 256 byte record.

The RLT protocol, which was introduced in the description of Figure 10 will now be described in more detail.

The RLT protocol is used for passing control and data information via the control 212 and data 213 buses on the modem shelf and is valid on the radio link from the antenna 52 of the central terminal and the subscriber terminal(s) 20.

The RLT protocol is an unbalanced protocol with the master communications interface 73 in the shelf controller 72 acting as a busmaster (M) and the slave communications interfaces 69, 71 and 75 on the analogue card, the modem cards and the tributary unit acting as slaves. In this example, the master communications functions in the shelf controller are shared between a 68000 series microprocessor and a Hitachi H8 microcontroller, which will be referred to as the master client and

master server, respectively. Alternatively, the client and server functions could be implemented on one microcontroller or processor. The slave communications processing functions in the tributary unit are also shared between a 68000 series microprocessor and an H8 microcontroller. In the other slave units, the slave communications processing is performed in a Hitachi H8 microcontroller, which will hereinafter be referred to as the slave server.

The second protocol is based on three layers. Figure 14 is a schematic representation of this layered protocol structure.

The master communications end point functions performed at the third layer include the following functions.

- A master initialisation service process (M-INIT) sets up the master client part of the master communications end-point in the shelf controller. This service call must be executed before the other communications functions can be performed.
- A master initialisation poll process (M-POLL) initialises the master server part of the master communications end-point. This service process must be called before the following functions can be performed.
- A master establish process (M-EST) establishes a connection over the bus from the master to a slave in response to a slave address referencing a slave board. Messages can be sent and received once a connection has been established.
- A master send process (M-SEND) takes a message and sends it to a nominated slave over the bus as long as the connection to the slave has already been established.
- A master receive process (M-REC) receives a message from a slave to be passed, for example, to a management processor.
- A master release process (M-REL) releases a connection to a nominated slave preventing further send and receive functions from being performed.
- A master select process (M-SEL) provides an addressing mechanism for the master to select one of the slaves with which to communicate.

The slave communications end-point functions performed at the third layer include the following functions.

- A slave initialisation service process (S-INIT) initialises the slave communications end-point. This service function must be called before any of the other functions can



be performed.

- A slave send process (S-SEND) takes a message and sends it to the master, as long as the master has already established a connection to the slave.

- A slave receive process (S-REC) function receives a message from the master to be passed, for example, to a network service element addressed by the message.

The master communications end-point M includes the following functional components.

- A master VM component (MVM) provides a set of services for the management of storage to dynamically allocate memory for buffers, queues, semaphores and timers.

- A master layer 1 component (ML1) provides low level communication primitives for supporting byte transfer from the master server using a serial communication interface.

- A master status list component (MSL) holds the status of each link from the master to one of the slaves. This is updated when a connection is made, broken or released.

- A master retry count component (MRC) tracks the number of retries attempted in master to slave layer 2 communications. If this exceeds the limits for layer 2, the master breaks the connection with the slave.

The slave communications end-point M includes substantially the same functional components as the master.

The master layer 1 component (ML1) provides the following level 1 functions.

- A master layer 1 initialisation process initialises the layer 1 communications system. No layer 1 communications can take place until this process has been invoked.

- A master layer 1 byte-output process outputs a byte out of a serial communications port and waits for an acknowledgement from the receiver. If no acknowledgement is forthcoming, then a failure is registered.

- A master layer 1 data-out process is similar to the byte output process except that more than one byte can be transferred.

- A master layer 1 address-out process is similar to the byte output process except that the source byte is output with a bit set to indicate that this relates to a multiprocessor address rather than a data byte.

- A master layer 1 data-in process waits for a specified number of bytes to be

received on the communications port. If less than the required number of bytes is received, then a failure is registered.

The master VM component (MVM) provides the following functions:-

- A master VM initialisation process initialises the master VM component. This must  
5 be called before any other VM service.
- A master VM get-message process removes a message from one of the queues held by the VM component.
- A master VM put-message process places a message on one of the queues held by the VM component.
- 10 - A master VM queue-full process indicates whether a selected queue is full.
- A master VM get-buffer process allows a buffer to be requested from a buffer pool held by the VM component.
- A master VM give-buffer process allows a buffer requested by the get-buffer process to be returned to the pool.
- 15 - A master VM get-semaphore process allows a semaphore held by the VM component to be set.
- A master VM give-semaphore process allows a semaphore set by the get-semaphore process to be cleared.
- A master VM set-timer process sets a time-out period for one of the timers held by  
20 the master VM component. A flag is set by the master VM component when the timer expires.
- A master VM add-timer function process registers an application function with the master VM component to be called at a particular time.

25 The master and the slaves both use VM components to provide buffers, queues, semaphores and timers in order to permit the transfer of messages. The operation of the second protocol will be illustrated by reference to specific examples below:

The first example relates to the establishment of a connection from a master to a slave.

30 To connect the shelf controller master to one of the slaves, the shelf controller invokes the master establish process in the master end-point and supplies the link

address of the slave (S-ID) with which the connection should be made. Figure 15 illustrates how the master 300 maintains a message queue 302 to store requests such as an establish request, and how these requests are handled.

Invoking the master establish process has the effect of placing a connect tag  
5 304 onto the message queue along with the address (S-ID) 305 of the slave with which the connection is to be made. The work queue is shared between the client and server portions of the master end-point allowing a master client application to place a connect tag onto the message queue via the establish process and the master server to remove it and act upon it as part of the server poll processes. With this mixed  
10 client and server implementation, poll processes are introduced between the master and slave as set out below:

- A master poll process 306 is provided in the master server and is called repeatedly on the master server. This services all of the requests placed in the message queue by the client.
- 15 - A slave poll process 310 is provided in the slave server and similarly is called repeatedly on the slave server.

When called, the master poll process checks the message queue for requests and in this case extracts a connect tag and the slave address from it. The pool process then sends out a connect command 308 to the nominated slave and awaits a  
20 response. If the response is valid, the status of the link to the selected slave is changed to 'connected', allowing the send and retrieve services to be used.

The second example relates to the sending of a message from the master to a nominated and connected slave. This is illustrated in Figure 16.

In order to send a message from the master to the nominated and connected  
25 slave, an application invokes the master send process 312. The send process requests a buffer 323 from the master VM component buffers 324 and copies the message to be sent to it. It then places a send tag 316 and the buffer number 318 on the work queue 314 for a subsequent poll call to deal with.

The master poll process 306 extracts the send tag 316 and the buffer number  
30 318 from the message queue 314. It uses the buffer number 318 to extract 326 the message from the buffer 323 and then sends 330 the message to the nominated slave.

The message is received at the slave end-point under interrupt. At the next call to the slave poll process 310, a buffer 343 is requested from the slave VM component buffers 344 to hold the incoming message. The slave poll process 310 then places the message into the buffer 343 and puts a receive tag 336 and the buffer number 338 onto the slave receive queue 334. Messages can be received and put into the slave receive queue 334 until either the queue is full or no further buffers are available in the slave VM component buffers 344. Once a message has been transmitted and successfully received, the master gives its message buffer back to the master VM component for re-use using the master give-buffer process.

10       The message is delivered to the application when the application invokes a slave receive process 346. The receive process 346 checks the receive queue 334 for entries and, on finding one, extracts the buffer number 338 and reads the incoming message from the buffer 343. The buffer 343 is then returned to the slave VM component for re-use.

15       The sequence for sending a message from the slave to the master is similar except that the slave holds a separate send queue, rather than placing send and receive tags on the message queue. Send requests are placed on the send queue by client calls to the slave send process. When a slave receives a ready-to-receive command from the master, the slave poll process removes a send request and a buffer number from the send queue, gets the message from the slave VM buffer and transmits it to the master. At the end of the sequence it returns the buffer to the slave VM component for reuse.

25       The second protocol uses a sequence number, which alternates between 1 and 0, for passing messages between the master and the slave. An example of a message exchange is set out below.

Initially an exchange between the master and the slave establishes a link as part of a level 2 process.

Master		Slave
30 Poll(address)	-->	
	<--	Response(data or not)

```

Reset          -->
               <--      Reset response

```

Then a data message exchange takes place as part of a level 1 process.

5	Master		Slave
	SEND(0) data	-->	
		<--	SRR(1)
	MRR(0)	-->	
		<--	DATA(1)

10

In this process the 1 or 0 between brackets associated with each message forms the sequence number, which can be represented by a single bit which is switched by a recipient of a message before a reply is sent in response to the successful receipt of the message. If the message is not received correctly, then the sequence number is not switched. This is illustrated in the following example.

15 sequence number is not switched. This is illustrated in the following example.

	<b>Master</b>		<b>Slave</b>
	<b>SEND(0) data</b>	-->	
		<--	<b>SRR(1)</b>
<b>20</b>	<b>MRR(1)</b>	-->	
		<--	<b>SRR(0)</b>
	<b>MRR(1)</b>	-->	
		<--	<b>DATA(0)</b>

25 In the sequence shown immediately above, the SRR message transmitted by the slave was not correctly received by the master. Accordingly, a response was sent without changing the sequence number. This then caused the slave to re-send the SRR message and the sequence proceeds as before but with the sequence numbers now inverted with respect to the first example.

30 In practice the sequence number is provided twice in a message byte, in two bits; although it could alternatively be provided only once, in one bit.

The shelf controller provides an interface between the SMP and RLT protocols. The shelf controller operates mainly in accordance with the first protocol, but is provided with the microprocessor and a communications microcontroller which together form a client/server end point for the second protocol and convert messages  
5 from one protocol to the other. Figure 16 illustrates an example of how the shelf controller provides an interface between the messages sent in accordance with the two protocols, in this case for event handling.

An event command interpreter 402 decodes event commands received from the management processor under the SMP protocol and appropriate functions from  
10 other event modules are called to implement the command.

An event message decoder decodes an incoming message received from one of the slave modules under the RLT protocol and calls appropriate functions from the event controller.

An event processor 406 provides one function for each event message type  
15 and, in addition, functions which service internal events from a configuration controller 408 and other sources such as a card presence detector 409 and a state machine controller 410 in the shelf controller. The functions include passing events to either a non-urgent buffer 411 or to an urgent buffer 412 and directing movement of buffer contents to and from the management processor in response to control  
20 messages.

An event composer 414 allows the constructions of messages for sending under the SMP protocol containing event records and other related matters.

An event time administrator 416 marks the events with the time they are received by the event processor. A sequence number administrator 418 handles the  
25 assignment of sequence numbers to event messages. A separate current sequence number is maintained for each event.

Similar processing is performed for alarms and other messages.

Figure 18 is a schematic overview of the site controller and illustrates the relationship between various server objects. The management of the  
30 telecommunications network including the central terminal, the subscriber terminals and the site controller, is based on a hierarchical object-based data structure. Figure

19 provides one possible overview of that data structure.

The SMP communications handler 512 is responsible for the transmission and reception of SMP messages between the site controller and the shelf controller. A test manager 514 carries out line tests. A site viewer 516 enables a view to be  
5 created of the whole site using data contained in the site configuration database which is managed by the site configuration database manager 508.

The site configuration database contains an object-based structure where a plurality of objects, each representing a respective element of the site, are arranged in a structured hierarchy. Figure 18 represents an example of such a structured data  
10 base. The various objects in the list are linked together by at least one pointer for each node which points to its parent object. This process continues right up to the root node which represents the whole site.

Various objects will be described in more detail below. Each of the objects includes a name field defining the name of the object and a status field containing  
15 status information about the object. The object may also contain one or more alarm parameters which can be set in response to specific alarm conditions relating, for example, to hardware errors, line malfunctions etc. The status field for an object includes a fault parameter which becomes set when at least one alarm parameter in  
20 the object or in a dependent object is set. In other words, when a fault parameter is set in one object, this fault status is propagated up the tree using the pointers to successive parent objects. Each of the objects also contains a definition of the object which can be used for displaying a representation, or view, of that object.

There is one site object (SITE) 530 in a database. This contains data about the site and is created automatically when the database is initialised. As well as a  
25 name field and a status field, this object contains a field defining the site location and a list of rack objects that the site contains.

The Rack objects (RACK) 532, 540, 542, etc. each represent a rack and contain data about the rack including a name field, a status field, a pointer to the site object 530, and pointers to the shelf objects (e.g., for rack object 532, pointers to  
30 the combiner shelf object (CS) 534 and up to four modem shelves (MS) 536, 538).

The combiner shelf object (CS) 540 represents an RF combiner shelf and

contains data about the combiner shelf including a name field, a status field, a pointer to the containing rack object (e.g., RACK 532), a pointer to the shelf's low noise amplifier card object (LNA) 536, and pointers to power amplifier card objects (PA) 538.

- 5           The modem shelf objects (MS) 536 and 538 each represent a modem shelf and contain data about the modem shelf including a name field, a status field, a pointer to the containing rack object (e.g., RACK 532), an identifier field for the position of the shelf in the rack, a field for the identity of the serial port through which the site controller communicates with the shelf, a field for the baud rate for the serial port,  
10   a pointer to the shelf controller card object (SC) 540, a pointer to a tributary card object (TU) 542, a pointer to the RF analogue card object (RFA) 544, and pointers to up to eight modem card objects (MC) 546.

- The modem card objects (MC) 546 each represent a modem card and contain data about the card including a name field, a status field, a pointer to the modem  
15   shelf object (e.g., MS 536) containing the modem card, an identifier number for the modem card (0-7) and pointers to modem objects (MODEM) 550.

- The modem objects (MODEM) 550 each represent a modem and contain data about the modem including a name field, a status field, a pointer to the modem shelf object (e.g., MS 536), a pointer to the subscriber terminal object (ST) 552 which is  
20   connected via the radio link to the modem, pointers to subscriber objects (SUB) 554 supported by the modem and pointers to the tributary unit channel objects (TUCH) 548 which connect to the modem.

- The shelf controller card object (SC) 540 represents a shelf controller and contains data about the card including a name field, a status field and a pointer to the  
25   modem shelf object (e.g., MS 536).

          The Tributary unit card (TU) 542 represents a tributary card and contains data about the card including a name field, a status field, a pointer to the modem shelf object (e.g., MS 536), pointers to the card's tributary unit channels (TUCH) 548 and a definition field for the protocol used by the tributary card.

- 30           The RF combiner and analogue card object (RFA) 544 represents the RF card and analogue card pair and contains data about the card pair including a name field,



a status field, a pointer to the modem shelf object (e.g., MS 536), a field representing the transmitter frequency and a field representing the receiver frequency.

The low noise amplifier card object (LNA) 536 represents a RF combiner shelf low noise amplifier card and contains data about the card including a name  
5 field, a status field and a pointer to the RF combiner shelf object (RFC) 534.

The power amplifier card objects (PA) 538 each represent an RF combiner shelf low noise amplifier card and contain data about the card including a name field, a status field and a pointer to the RF combiner shelf object (RFC) 534.

The subscriber terminal object (ST) 552 represents a subscriber terminal  
10 served by a modem and includes data about the subscriber terminal including a name field, a status field, the CDMA code of the subscriber terminal channel and a pointer to the corresponding modem (MODEM) 550.

The subscriber objects (SUB) 554 each represent a subscriber circuit and contain data about the subscriber including a name field, a status field, a recall field,  
15 an intrusion tone field and a subscriber line active field as well as a pointer to the modem (MODEM) 550 and the tributary unit channel (TUCH) 548 associated therewith.

A line test object (LT) 556 represents a line test in progress and contains data about the line test including a name field, a status field and a pointer to the subscriber  
20 object 554.

A test result object (TR) 558 indicates a test result and contains data about the test result including a name field, a status field and a pointer to the line test object which initiated the test.

Uncleared alarm objects 559 are chained to their source card.

25 Returning to Figure 18, the transaction log manager 510 contains a history of all the configuration messages sent to the site's shelves and all the event and performance messages received from the shelves, subject to log file size limits.

The site viewer 516 allows an operator to monitor the state of the site. The site viewer provides alternative views of the site to be displayed on the display screen  
30 of the site controller workstation using the data stored in the object database.

In accordance with a first view, the site viewer provides a view showing the

main nodes of the object based hierarchy, namely a representation of the site object node with a representation of each of the rack object nodes connected thereto and the links between them, corresponding to the pointers in the objects. The display can be structured similarly to the representation in Figure 19, but without the lower order  
5 objects being displayed.

The user can interact with this first view, for example to expand one branch of the view. This can be achieved using conventional windows-based operating tools for pointing to and selecting an displayed object using a mouse and mouse buttons, for example. The daughter nodes for a selected node can then be displayed. This  
10 process can be used, for example, to expand branches of a tree to locate faults.

The site configuration database manager interacts with the object database to monitor and update fault parameters and alarm parameters in the database objects. When an alarm condition occurs in a network element, the database manager sets the corresponding alarm parameter in the object for that network element. At the same  
15 time the fault parameter is set for that database object. A database object may contain more than one alarm parameter. The fault parameter in the object database status field is set whenever one or more alarm parameters are set in that database object. The database manager also traces the pointers up the tree to the site object setting the fault parameters for each of the database objects which it encounters on  
20 the way.

The site viewer, and also the other viewers to be described later, are responsive to the fault parameters in the database objects to visually distinguish displayed objects for which a fault parameter has been set. Typically the fault conditions is displayed by changing the displayed colour of the object in question, and/or by causing the object in question to flash. In a preferred embodiment, a  
25 displayed object for which a fault condition has occurred is flashed red.

In the situation where the first site view mentioned above is displayed, the site object and the rack object corresponding to the rack in which a fault has occurred will flash red. This will alert the operator to the fault condition, and by selecting the  
30 appropriate displayed rack object, the database tree structure can be expanded along the appropriate branch down to the object corresponding to the network element

where the fault has occurred.

Alternative display expansion modes can be provided where the tree is automatically expanded when a fault occurs, or when the operator requests the expansion of the tree (for example by selecting the lowest order object currently  
5 displayed in the fault line) or where the tree has to be expanded manually level by level by the operator selecting the appropriate object to be expanded.

A second site view is also provided where a graphical representation of each rack on the site is displayed to the operator on the display of the site controller work station. Each rack object includes a rack identifier so that each displayed  
10 representation of a rack corresponds to a physical rack. The site viewer causes the objects for the racks to be accessed via the database manager 508 in order to display an appropriate graphical representation of each of the rack frames with openings for the rack shelves. These openings are then filled with representations of the fronts of the respective shelves. The site viewer causes the objects for the shelves to be  
15 accessed via the database manager 508 in order to display a graphical representation of each shelf front in an appropriate opening in the graphical representation of corresponding rack frame. The combiner shelf always occupies a fixed position within the rack and the modem shelf objects contain an identifier field for the position of the shelf in the rack, so that each representation of a shelf front in the rack display  
20 corresponds to a physical rack shelf position.

In this case, when the fault parameter in a shelf object is set, the representation of the shelf on the display will be highlighted (e.g., by displaying the shelf in a different colour or flashing). Accordingly, simply by viewing the display, the operator can immediately identify which rack has a shelf with a fault and the  
25 physical position of the shelf within the rack.

Moreover, the site viewer is responsive to the operator selecting the highlighted shelf (eg by clicking on a mouse button when a mouse pointer is pointing at the shelf in question) to call the shelf viewer 518. The shelf viewer 520 causes a graphical representation of the shelf of interest to be displayed on the workstation  
30 display. It does this by causing the object for the shelf concerned to be accessed via the database manager 508 to display an appropriate graphical representation of the

shelf. Also, the shelf viewer causes the objects for the cards on the shelf to be accessed via the database manager 508 to display a graphical representation of each card on the shelf. The card objects include data defining the object view and the position of the card within the shelf view. The shelf viewer is responsive to a fault  
5 parameter being set in the object for a card on the shelf to highlight the graphical representation of that card. In this way the operator can readily identify the physical card in which an error has occurred.

The shelf viewer is responsive to the operator selecting the highlighted card (eg by clicking on a mouse button when a mouse pointer is pointing at the card in  
10 question) to call the card viewer 520. The card viewer 518 causes a graphical representation of the card of interest to be displayed on the workstation display. It does this by causing the object for the card concerned to be accessed via the database manager 508 to display an appropriate graphical representation of the card. Also, the card viewer causes the objects for the network elements on the card to be accessed  
15 via the database manager 508 to display a graphical representation of each element on the card. The network element objects include data defining the object view and the position of the element on the card view. The card viewer is responsive to a fault parameter being set in the object for a network element on the card to highlight the graphical representation of that element. In this way the operator can readily identify  
20 the physical element in which an error has occurred.

The subscriber viewer 522 extends this process to a view of the subscriber line and the subscriber terminal 20.

It will be appreciated that the mechanism described above provides an effective and user friendly arrangement for identifying faulty components or elements within  
25 a network.

The updating of the fault parameters described above is performed by the site configuration database manager in response to alarm event messages received using the message structures described above from the physical elements at which faults have occurred. The alarm event messages are used to set alarm parameters in the  
30 lowest order objects associated with physical network elements. The establishment of alarm conditions (faults) can be achieved in any appropriate manner, either by

commands sent out from the site controller or other control elements in the network at appropriate times to test for faults, or by the elements where a fault has occurred automatically reporting the faults to the site controller.

5 An alarm viewer 524 enables alarm events occurring at a site to be monitored on the display of the site controller work station. This provides a tabular display of all the events that have occurred in the system. One of the event entries in the tabular display will be highlighted by the alarm viewer to indicate the current event. The highlight can be moved through the use of cursor keys and/or mouse movements and clicks.

10 A command history viewer 526 is used to display transaction history data retrieved from the database. A performance statistical viewer 528 similarly permits the display of statistical data.

The site controller command structure described with reference to Figures 18 and 19 can be used for monitoring faults in a working network or for active control  
15 of the network. It can also be used as part of a simulator of part or all of the network for design and/or testing purposes.

Figure 20 is a schematic representation of elements of a simulator 600  
incorporating the control structure described with reference to Figure 18 and 19 can be switched into the X.25 connection 57 between an element manager 58 and a shelf  
20 controller 72. The simulator 600 can be implemented by means of a personal computer or workstation comprising a processor, memory, display, keyboard, etc., suitably programmed to implement the desired processing functions.

As illustrated in Figure 20, the simulator 600 includes an SMP simulator 602  
which provides a simulation of the management processor (the site controller 56 or  
25 the element manager 58) and a shelf simulator 604 which simulates the operation of a modem shelf 46. The SMP simulator can provide basic management processor functions for testing the SMP protocol only, but it could be expanded to provide a full emulation of the site controller. The shelf simulation includes a full emulation of the physical shelf controller using largely the same software as the physical shelf  
30 controller. It also provides a simulation of selected management functions of the network elements on the modem shelf which are connected to the shelf controller, to

the extent that they are able to respond to commands from the shelf controller and to generate alarms and other status messages in response to being activated. In alternative embodiments a full simulation of the central station could be provided.

The simulator includes an SMP interface 606, including the modular message  
5 handling structure described with reference to Figure 11, which enables a real management processor to interface with the simulator by providing an interface between serial communications and the simulator's internal representation of SMP messages. The simulator also includes a shelf interface 608, including the modular message handling structure described with reference to Figure 11, which enables the  
10 simulator to interface with a real shelf via RS232 port.

The simulation of each of the various elements described above is embodied in objects which define those elements, each object containing a functional emulation of the element concerned.

An SMP exerciser 610 permits a user to construct low level SMP messages  
15 for testing the shelf controller on a message by message basis.

The protocol monitor 612 provides a monitor function for SMP messages as they pass between the other parts of the system. Thus messages are passed via the monitor with the monitor providing the necessary routing functions, allowing messages to be displayed, stored and stepped through and otherwise keep track of the  
20 messages being sent. As such, the simulator provides a powerful diagnostic tool for the telecommunications network.

Although a particular embodiment has been described herein, it will be appreciated that the invention is not limited thereto and that many modifications and additions thereto may be made within the scope of the invention.

CLAIMS

1. A message packet transmitter for generating message packets for passing control information between a central telecommunications station and a controller for one or more telecommunications stations, wherein said message packet transmitter generates packets of information comprising:
  - a packet header including a packet start pattern and a message size identifier for individually setting a message size for respective packets;
  - a variable number of message records, each having a size determined by the message size selected for the packet; and
  - a packet terminator including a packet end pattern invalid as an initial bit sequence for a message record.
2. A message packet transmitter according to Claim 1, wherein said message size for said message packets is selectable from a predetermined plurality of fixed sizes.
3. A message packet transmitter according to Claim 1 or Claim 2, wherein said message records in said message packet comprise a fixed length message record header and a message field for a said message, said message field having a size corresponding to said message size.
4. A message packet transmitter according to Claim 1 or Claim 2 wherein said message records in said message packet comprises a message record header and a message field for a said message, said message record having a size corresponding to said message size.
5. A message packet transmitter according to any one of the preceding Claims, wherein a said message record is provided with a message control field including a message type identifier identifying said message record as a command message or a report message and/or an element address to which said message record refers.

6. A message packet transmitter according to any one of the preceding Claims, wherein a said message record is provided with a message identifier field for defining a function code for said message record.
- 5 7. A message packet transmitter according to any one of the preceding Claims, wherein a said message packet is provided with a task identifier for associating message records.
8. A message packet transmitter according to any one of the preceding Claims,  
10 for supplying a message packet sequence identifier to said packet header of each message packet.
9. A message packet transmitter according to Claim 8 wherein said message packet sequence identifier is a number which is incremented modulo-n, where n is a  
15 whole number greater than 0, for successive packets.
10. A message packet transmitter for passing control information between a central telecommunications station and a controller for one or more telecommunications stations, said message packet transmitter being arranged to allocate message packet  
20 sequence identifiers to successive message packets, with said message packet sequence identifier being changed in accordance with a predetermined sequence for successive message packets, and to transmit up to a predetermined number of message packets to a message packet receiver, said predetermined number defining a sequence window, said message packet transmitter being responsive to the receipt of an  
25 acknowledgement including a message sequence identifier associated with message packet within said sequence window other than the last message packet of said window and to the absence of receipt of an acknowledgement from said message packet receiver including the sequence identifier for the last message packet of said window within a predetermined period following the transmission of the last of message  
30 packet of said sequence window and to retransmit the message packets subsequent to said message packet associated with message sequence identifier in the received



acknowledgement.

11. A message packet transmitter according to Claim 10, wherein said message packet transmitter is responsive to the absence of any acknowledgement from said message packet receiver within a predetermined period following the transmission of the last of message packet of said sequence window to retransmit all the message packets of said sequence window.
12. A message packet transmitter according to Claim 10 or Claim 11, wherein said message packet sequence identifier is a number which is incremented modulo-n, where n is a whole number greater than 0, for successive packets.
13. A message packet receiver for receiving message packets from a message packet transmitter according to any one of Claims 1 to 9, wherein said message packet receiver comprises means responsive to said start pattern to identify a message packet header, means for extracting said message record size identifier for said message packet header and for receiving and routing said message records until said end pattern is recognised.
14. A message packet receiver for receiving message packets from a message packet transmitter according to Claim 9, wherein said message packet receiver, on successful receipt of a message packet, returns to the message packet transmitter an acknowledgement including the packet sequence number of the message packet successfully received.
15. A message packet receiver for a message packet system for passing control information between a central telecommunications station and a controller for one or more telecommunications stations in which a message packet transmitter is arranged to allocate message packet sequence identifiers to successive message packets with said message packet sequence identifier being changed in accordance with a predetermined sequence for successive message packets, said message packet receiver

being arranged to track the message packet sequence identifiers for successive packets and to return an acknowledgement including the message packet sequence identifier for the last successfully received message packet when said predetermined sequence is broken or after a predetermined number of successfully received messages since  
5 the last acknowledgement was sent, said predetermined number defining a sequence window.

16. A message packet receiver according to Claim 15, wherein said message packet receiver is responsive to receipt of a message packet with a message sequence  
10 identifier for a previous sequence window which an acknowledgement has already been sent to retransmit said acknowledgement for said previous window.

17. A message packet receiver according to Claim 16, wherein said message packet receiver is responsive to receipt of a message packet having a message packet  
15 sequence identifier which is out of sequence but does not relate to said previous sequence window or to a next sequence window to discard said message packet.

18. A message packet receiver according to any one of Claims 15 to 17, wherein said message packet sequence identifier is a number which is incremented modulo-n,  
20 where n is a whole number greater than 0, for successive packets.

19. A message packet system comprising a message packet receiver according to any one of Claims 13 to 18 and a message packet transmitter corresponding to any one of Claims 1 to 12.

25



20. A controller for one or more central telecommunications stations, said controller comprising a message packet transmitter according to any one of claims 1 to 12 for transmitting control information to a central telecommunications station and/or a message packet receiver according to any one of claims 13 to 18 for  
30 receiving control information from a central telecommunications station.

21. A central telecommunications station comprising a message packet receiver according to any one of claims 13 to 18 for receiving control information from a controller for one or more central telecommunications stations and/or a message packet transmitter according to any one of claims 1 to 12 for transmitting control  
5 information to a controller for one or more central telecommunications stations.
22. A telecommunications system comprising a controller according to claim 20 and one or more central telecommunications station according to claim 21.
- 10 23. A method of passing control information between a central telecommunications station and a controller for one or more telecommunications stations, comprising:  
generating a message packet having a packet header including a packet start pattern and a message size identifier for individually setting a message size for respective packets, a variable number of message records, each having a size  
15 determined by the message size selected for the packet and a packet terminator including a packet end pattern invalid as an initial bit sequence for a message record;  
and  
transmitting said message packet.
- 20 24. A method according to Claim 23, wherein a said message record includes a fixed size message header and a message field having one of a plurality of selectable sizes.
- 25 25. A method according to Claim 23 or Claim 24, wherein each message record includes header fields comprising:  
a message control field including a message type identifier identifying said message record as a command message or a report message and an element address to which said message record refers;  
a message identifier field for defining a function code for said message record;  
30 and  
a task identifier for associating message records.

26. A method according to any one of Claims 23 to 25, wherein said message packet header includes a message packet sequence identifier.
27. A method according to any one of Claims 23 to 26, comprising, on receipt  
5 of a message packet, the steps of responding to said start pattern to identify a message packet header, extracting said message record size identifier for said message packet header and receiving and routing said message records until said end pattern is recognised.
- 10 28. A method according to Claim 26, comprising, on successful receipt of a message packet, returning to the message packet transmitter an acknowledgement including the packet sequence number of the message packet successfully received.
29. A method according to Claim 26 or Claim 28, comprising, at a message  
15 packet receiver, tracking message packet sequence identifiers for successive packets and returning an acknowledgement including the message packet sequence identifier for the last successfully received message packet when said predetermined sequence is broken or after a predetermined number of successfully received messages since the last acknowledgement was sent, said predetermined number defining a sequence  
20 window.
30. A method according to Claim 29, comprising, at said message packet receiver, responding to receipt of a message packet with a message sequence identifier for a previous sequence window which an acknowledgement has already  
25 been sent to retransmit said acknowledgement for said previous window.
31. A method according to Claim 29 or Claim 30, comprising, at said message packet receiver, responding to receipt of a message packet having a message packet sequence identifier which is out of sequence but does not relate to said previous  
30 sequence window or to a next sequence window to discard said message packet.

32. A method according to any one of Claims 26 and 28 to 31, wherein said message packet sequence identifier is a number which is incremented modulo-n, where n is a whole number greater than 0, for successive packets.

1/14

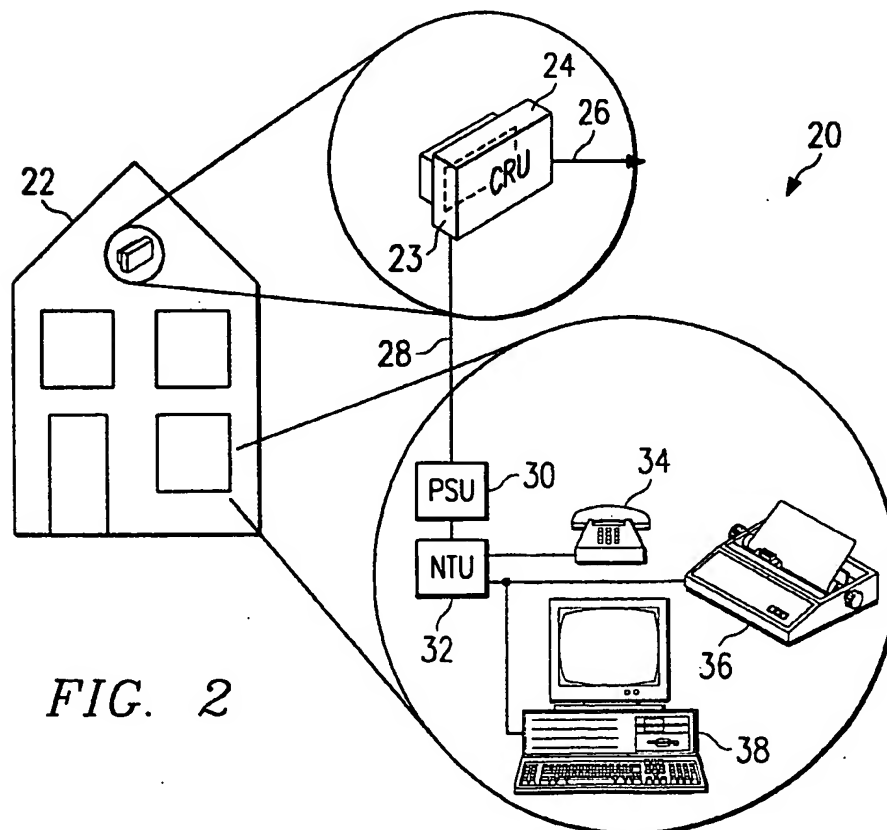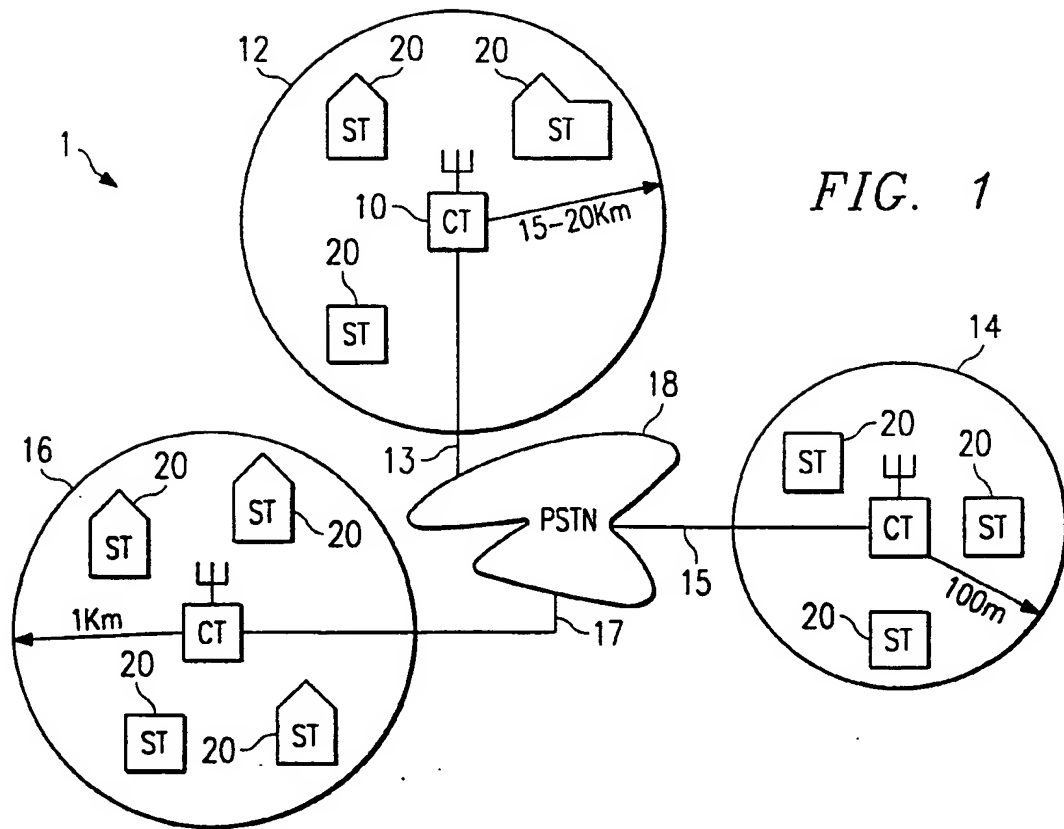

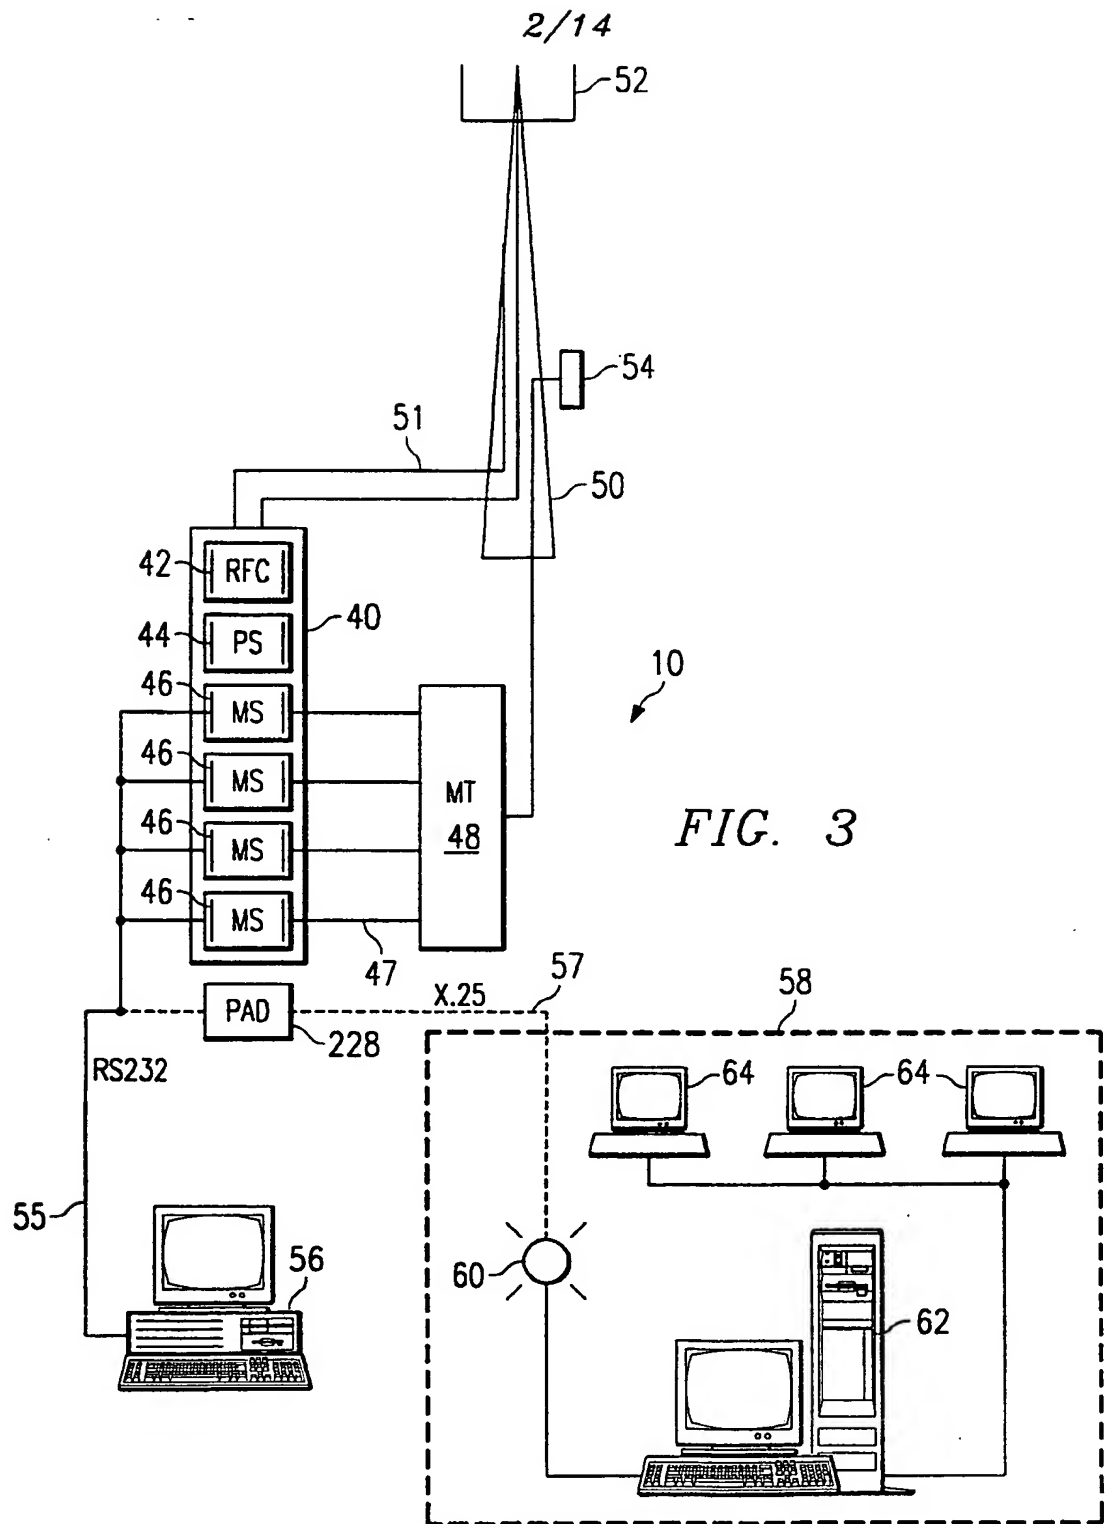


FIG. 3

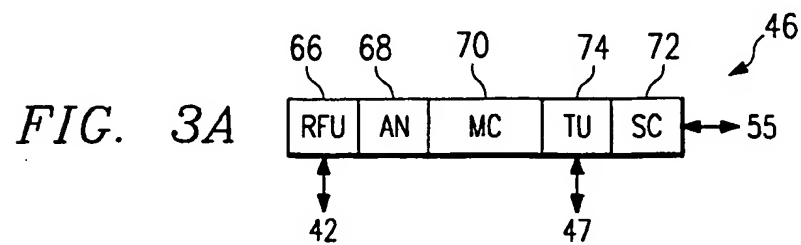


FIG. 3A


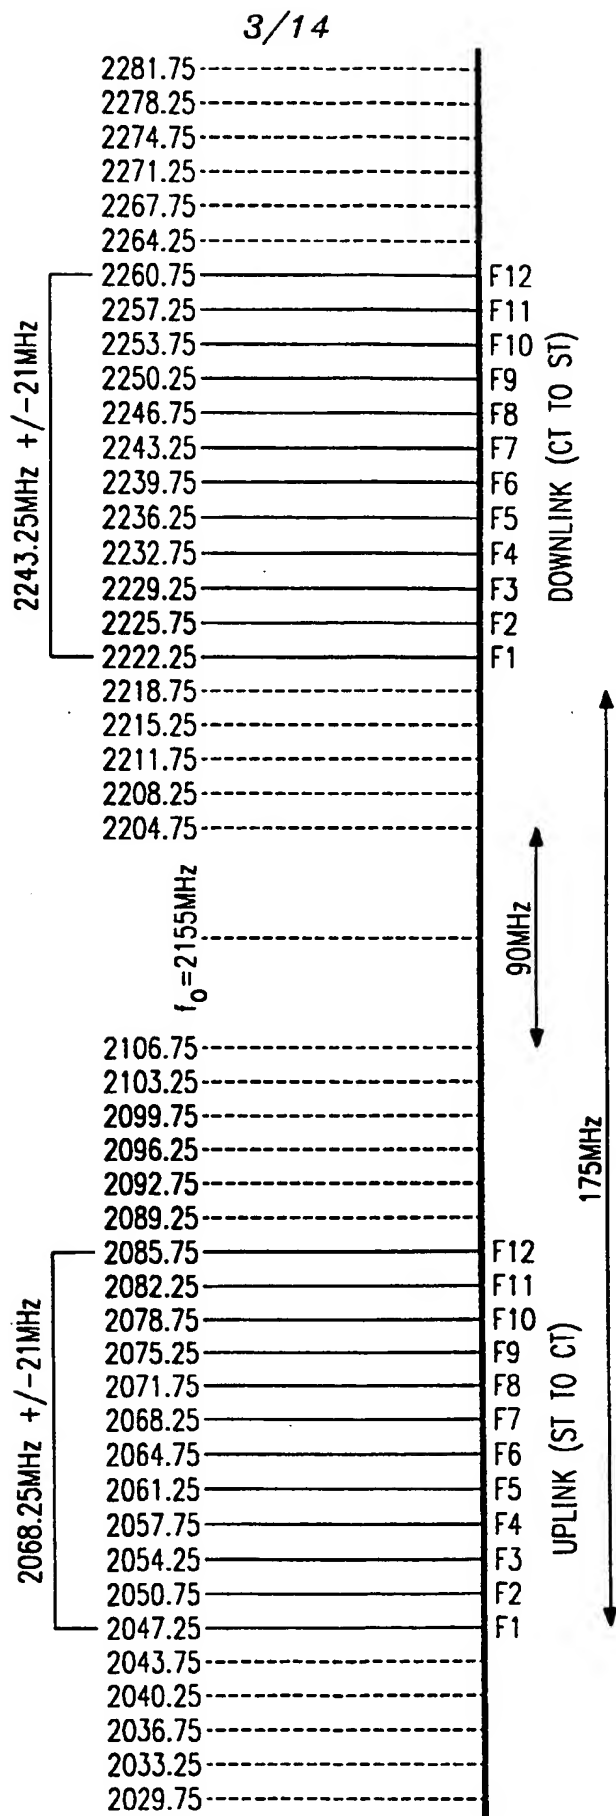


FIG. 4



4/14

FIG. 5A

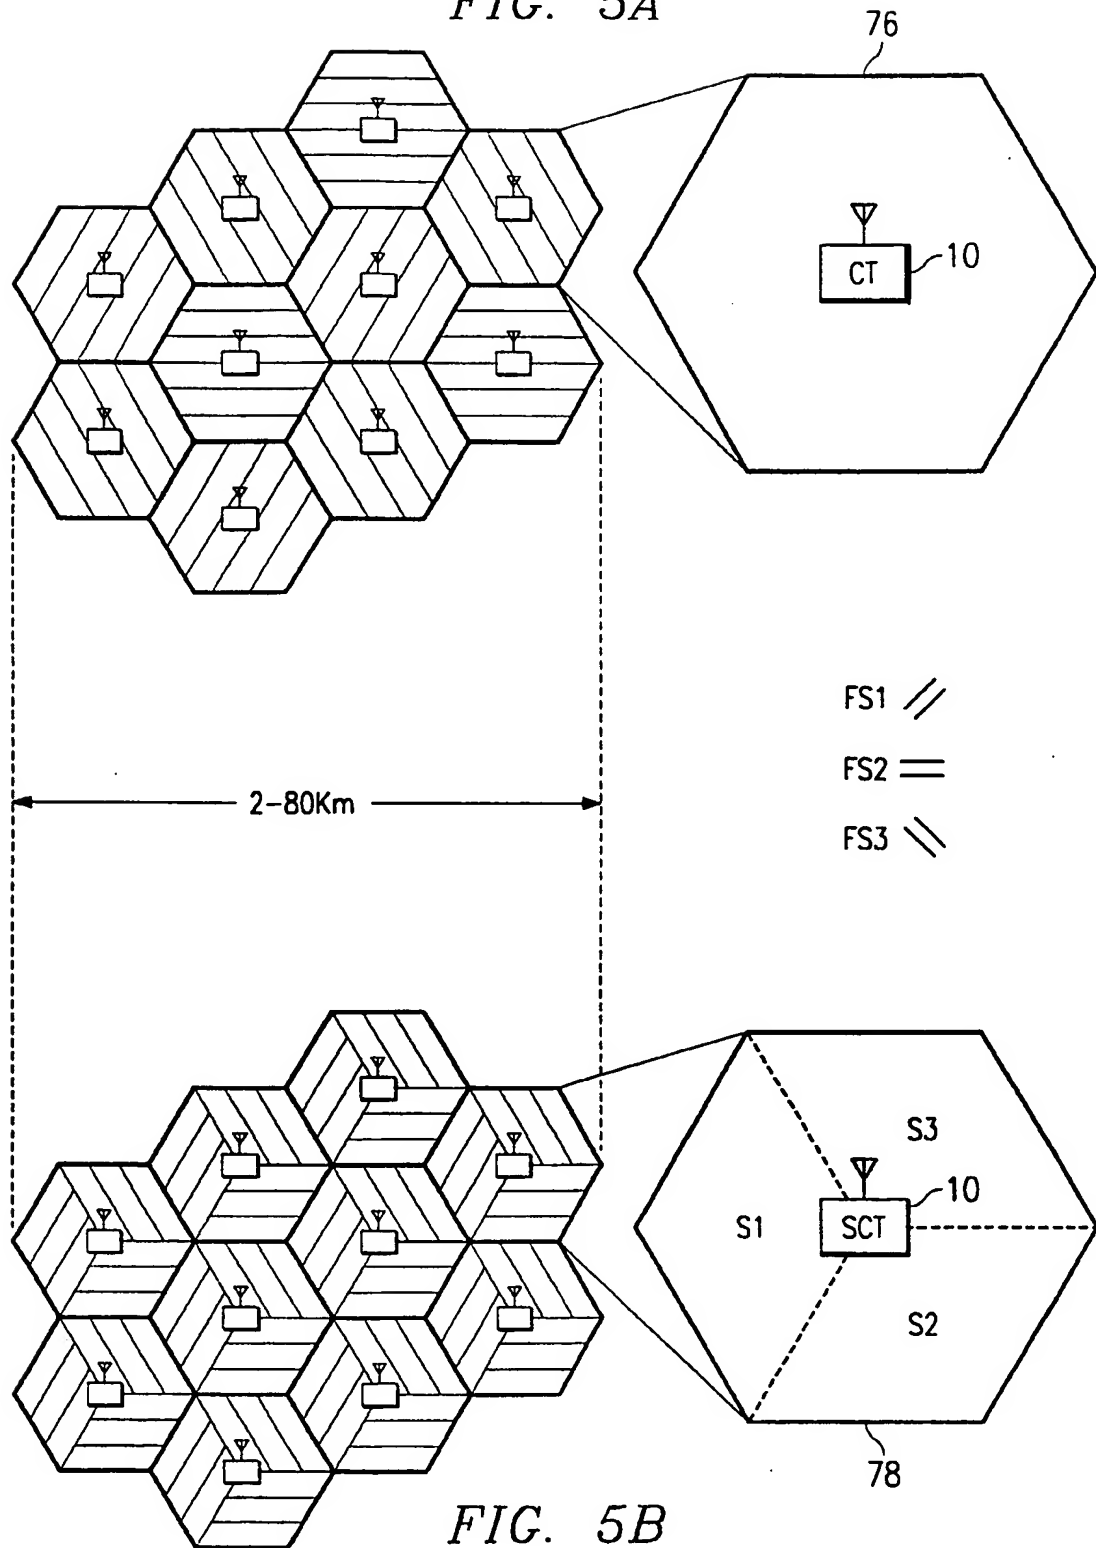

5/14

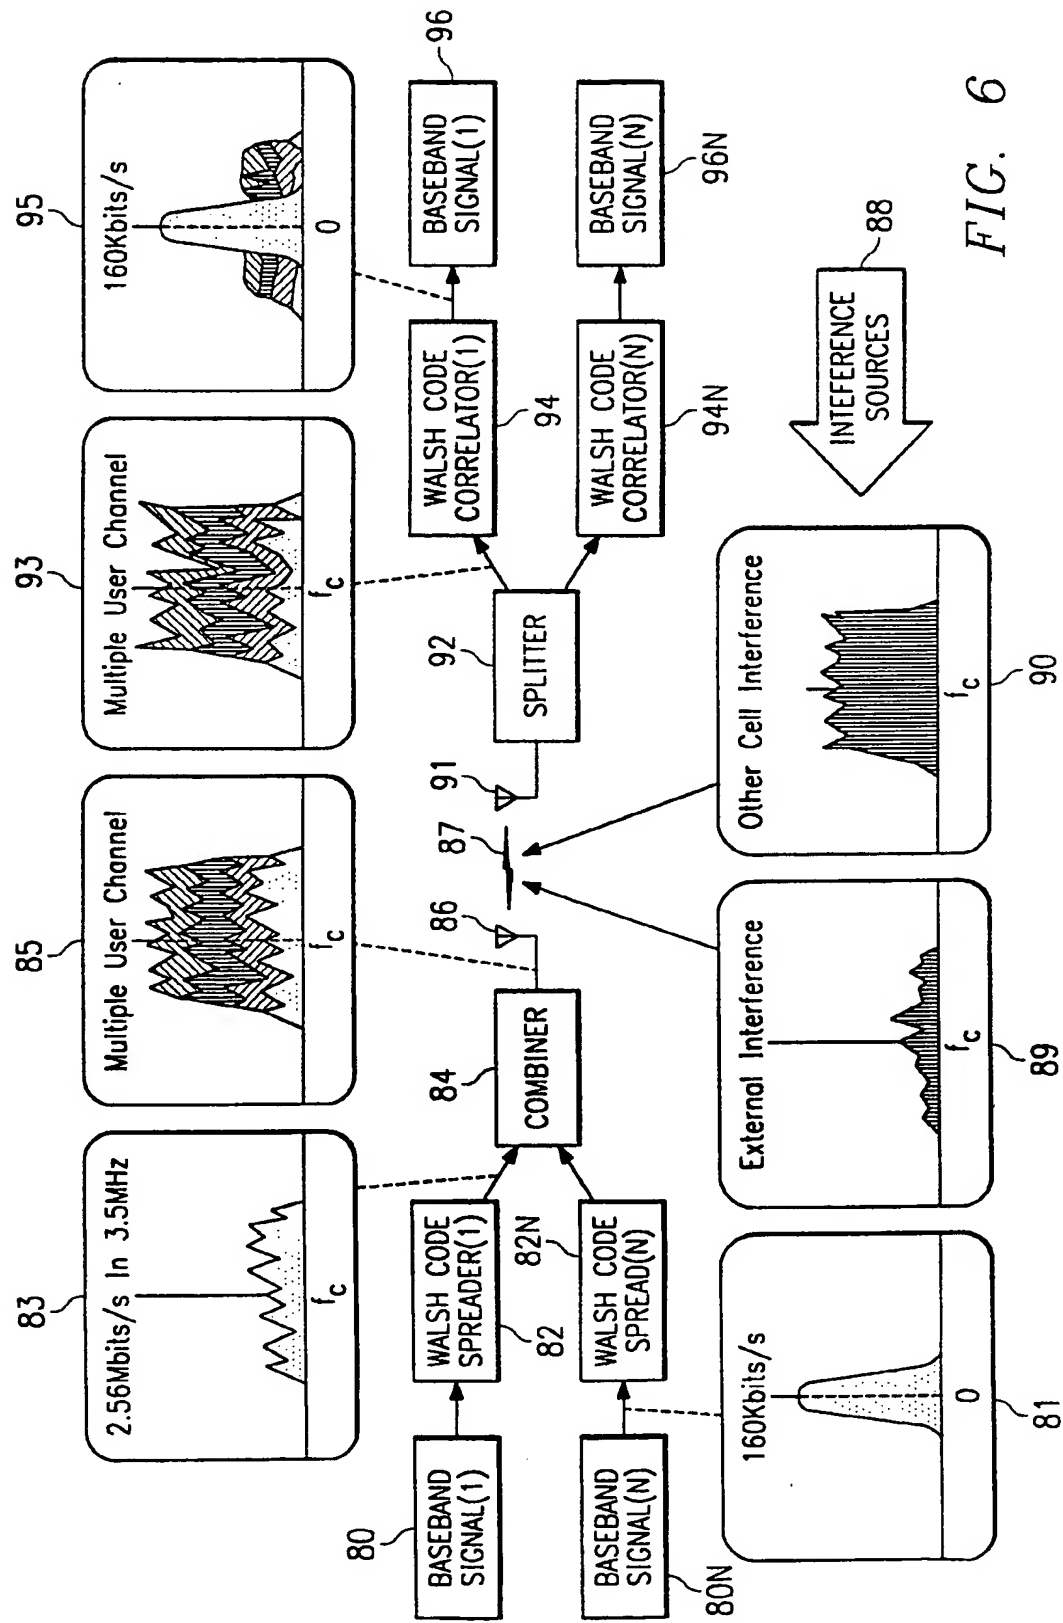


FIG. 6

6/14

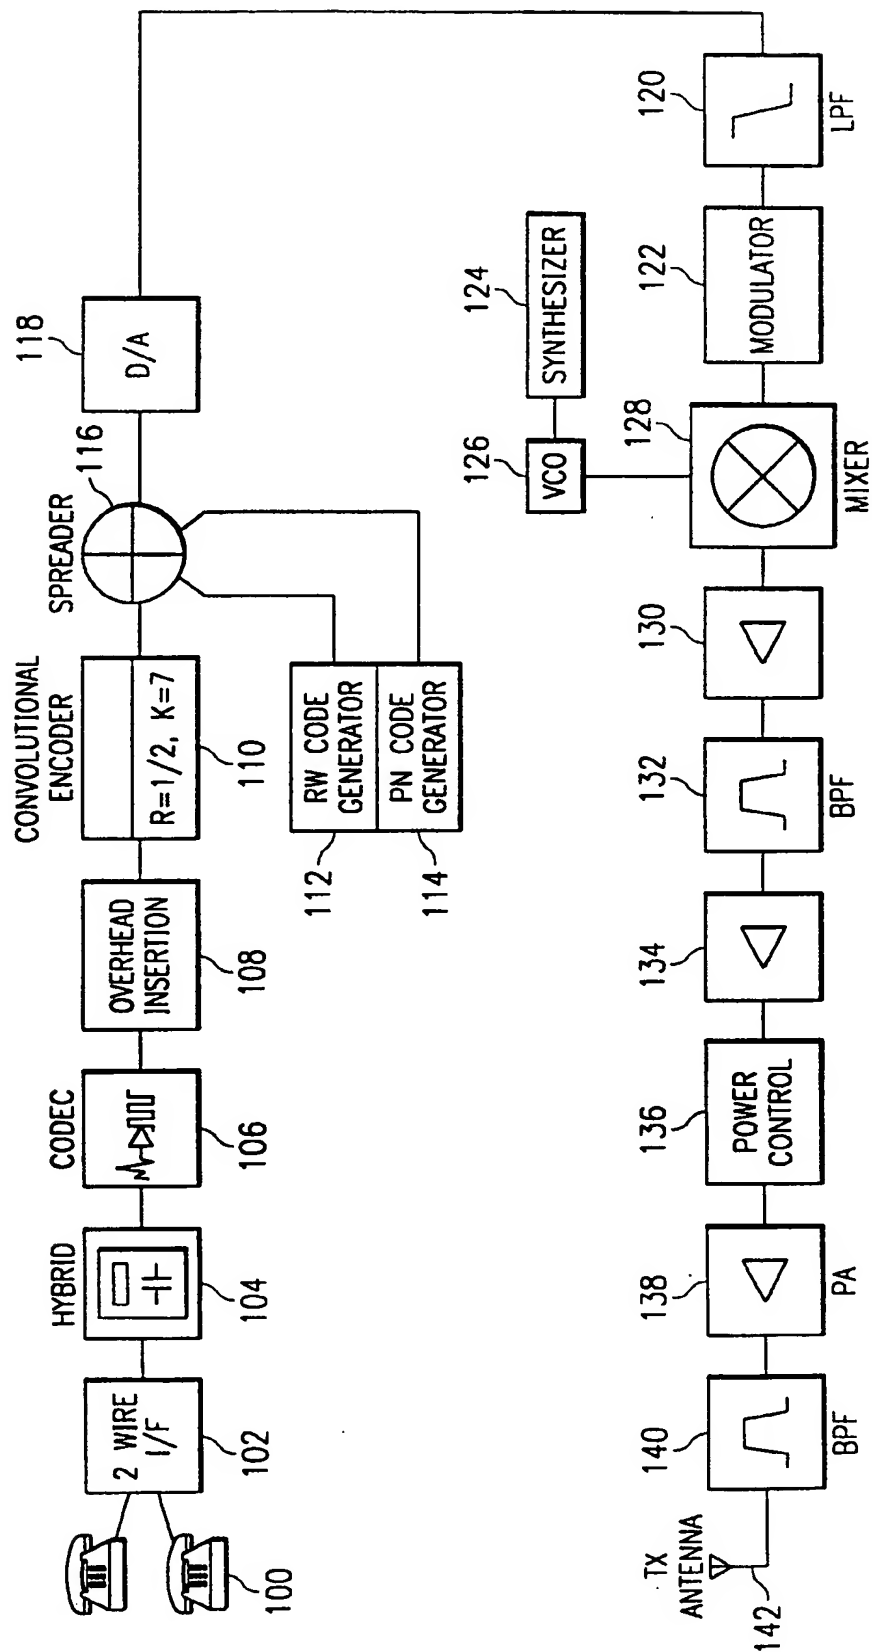


FIG. 7

7/14

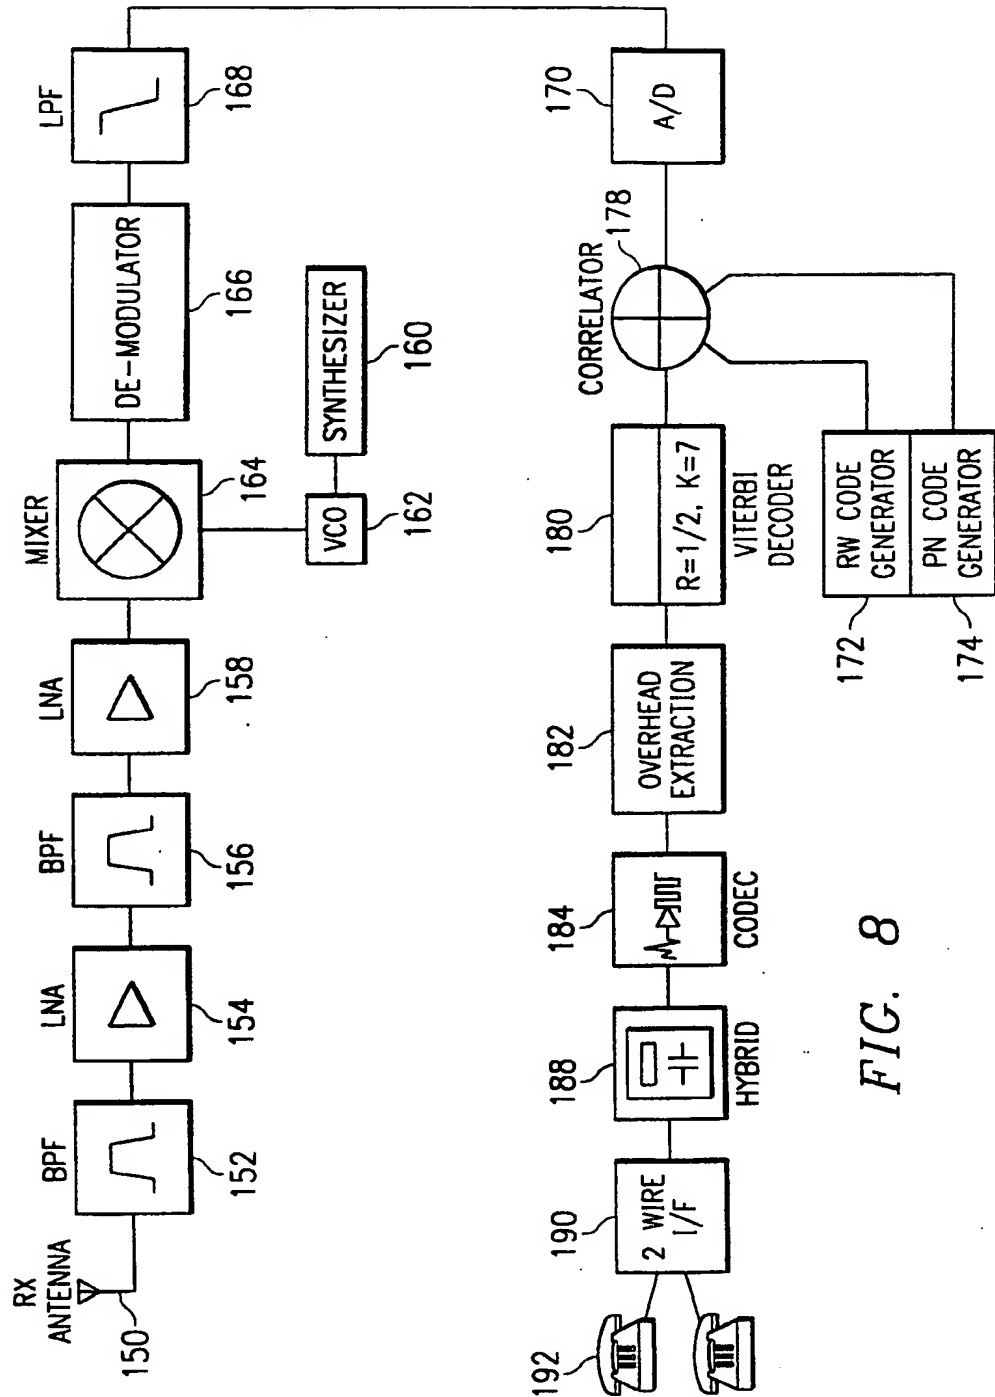


FIG. 8

8/14

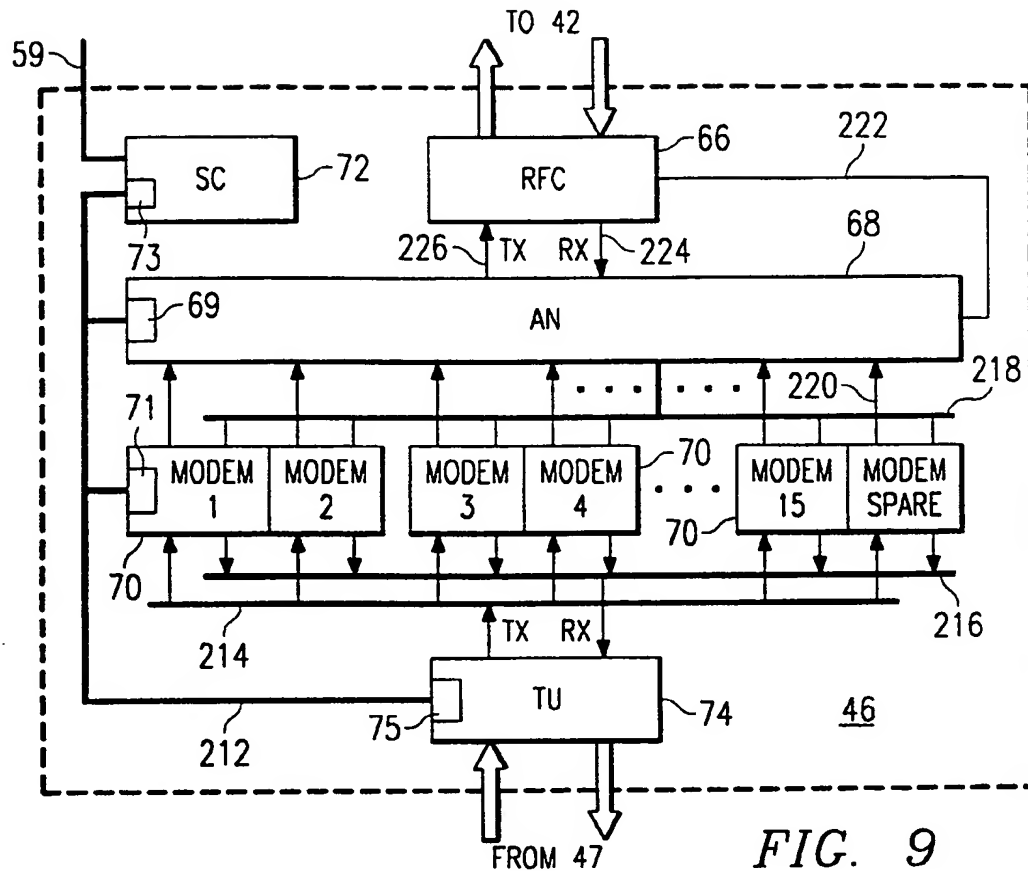


FIG. 9



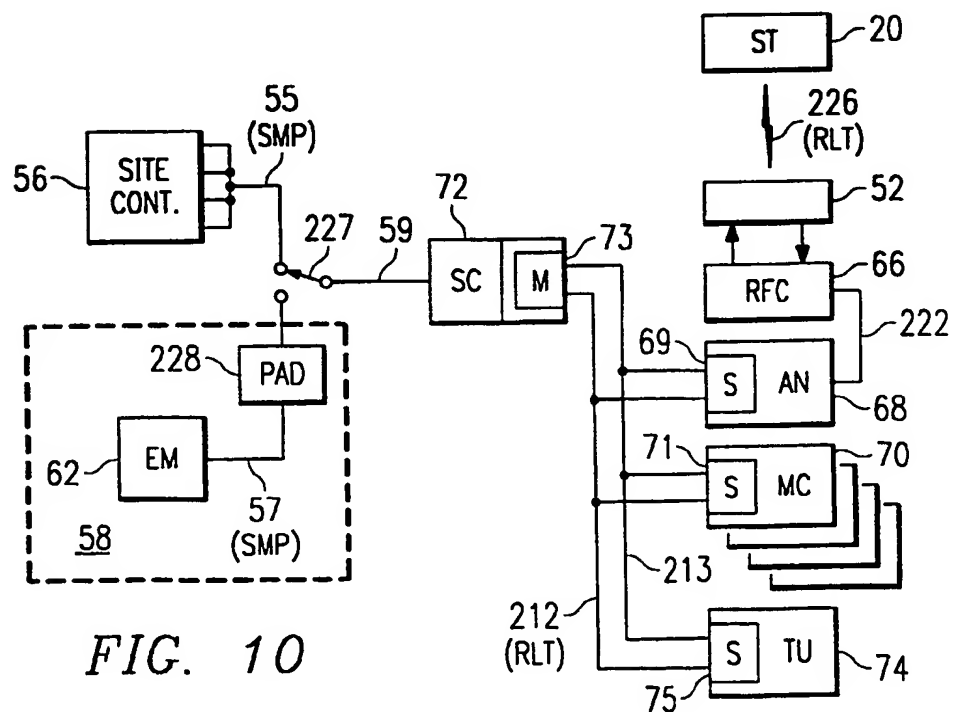


FIG. 10

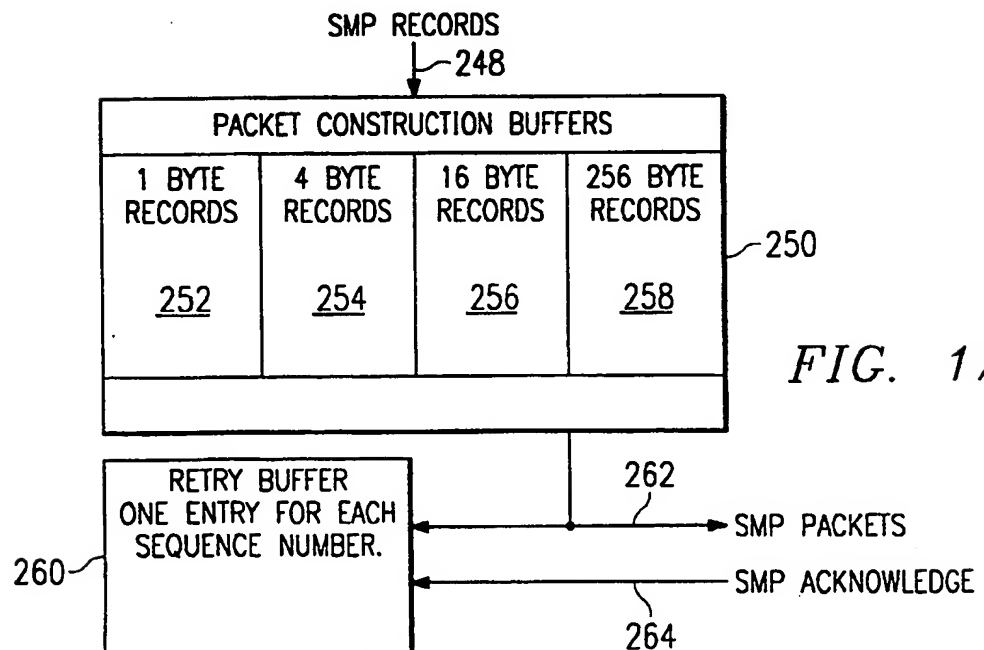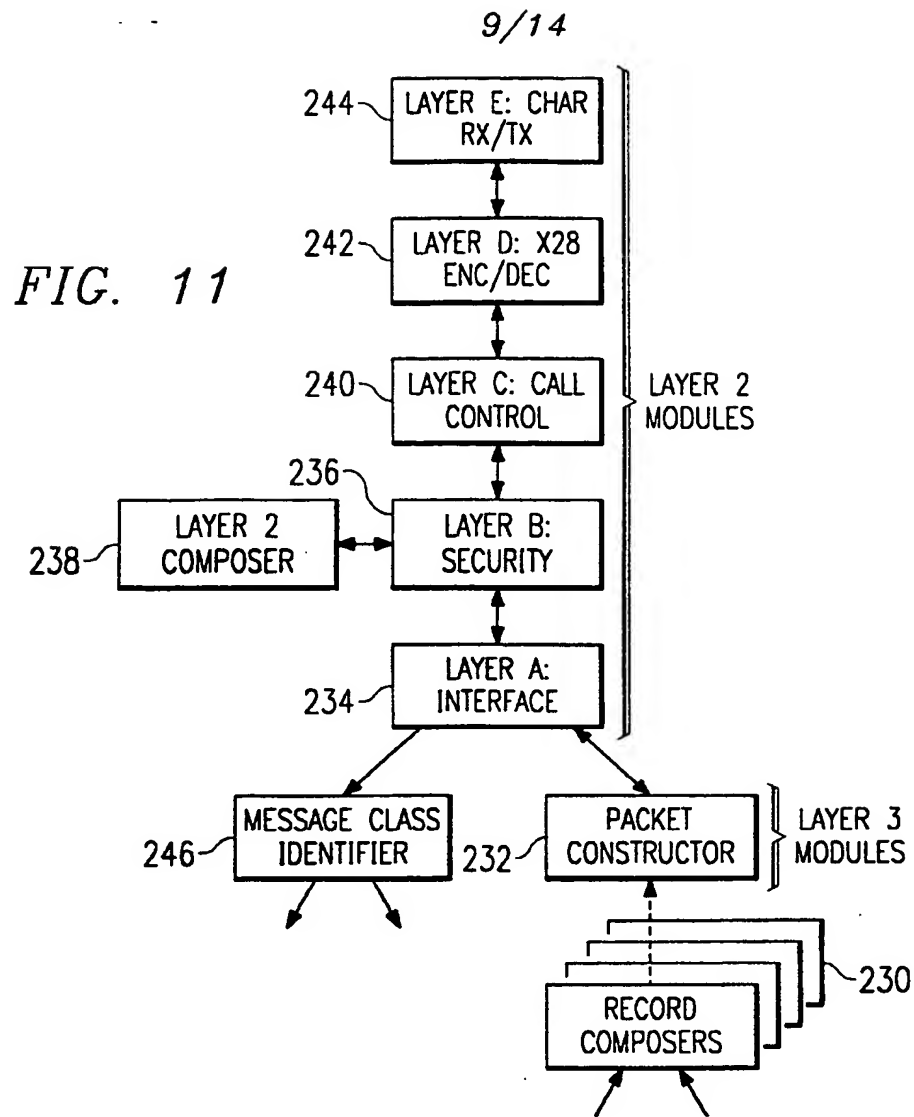

10/14

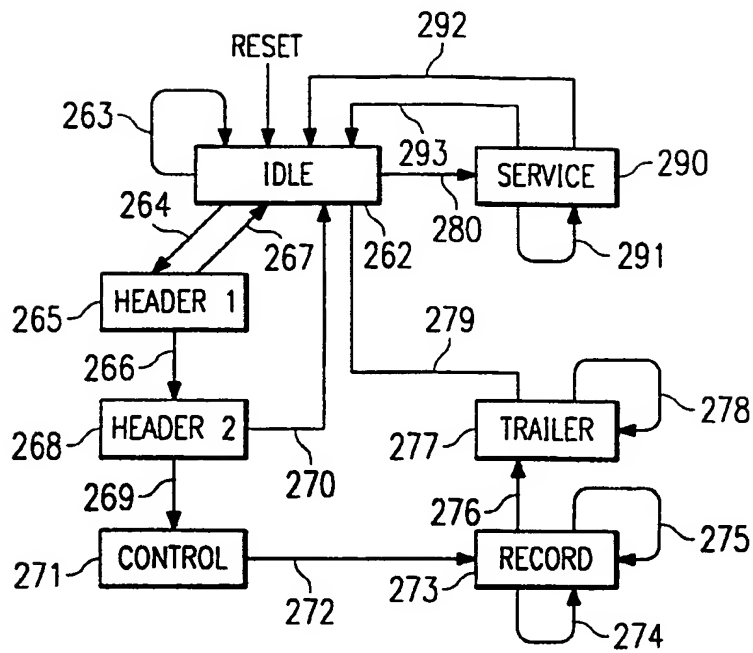


FIG. 13

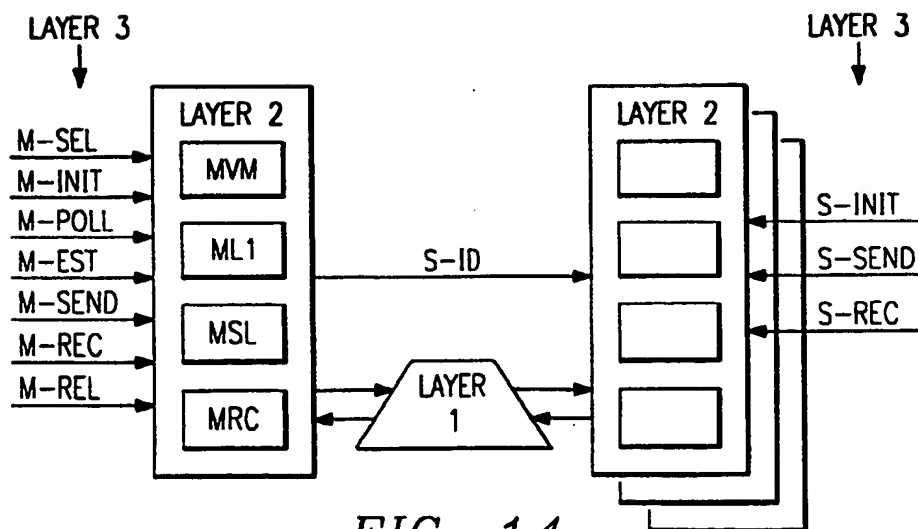
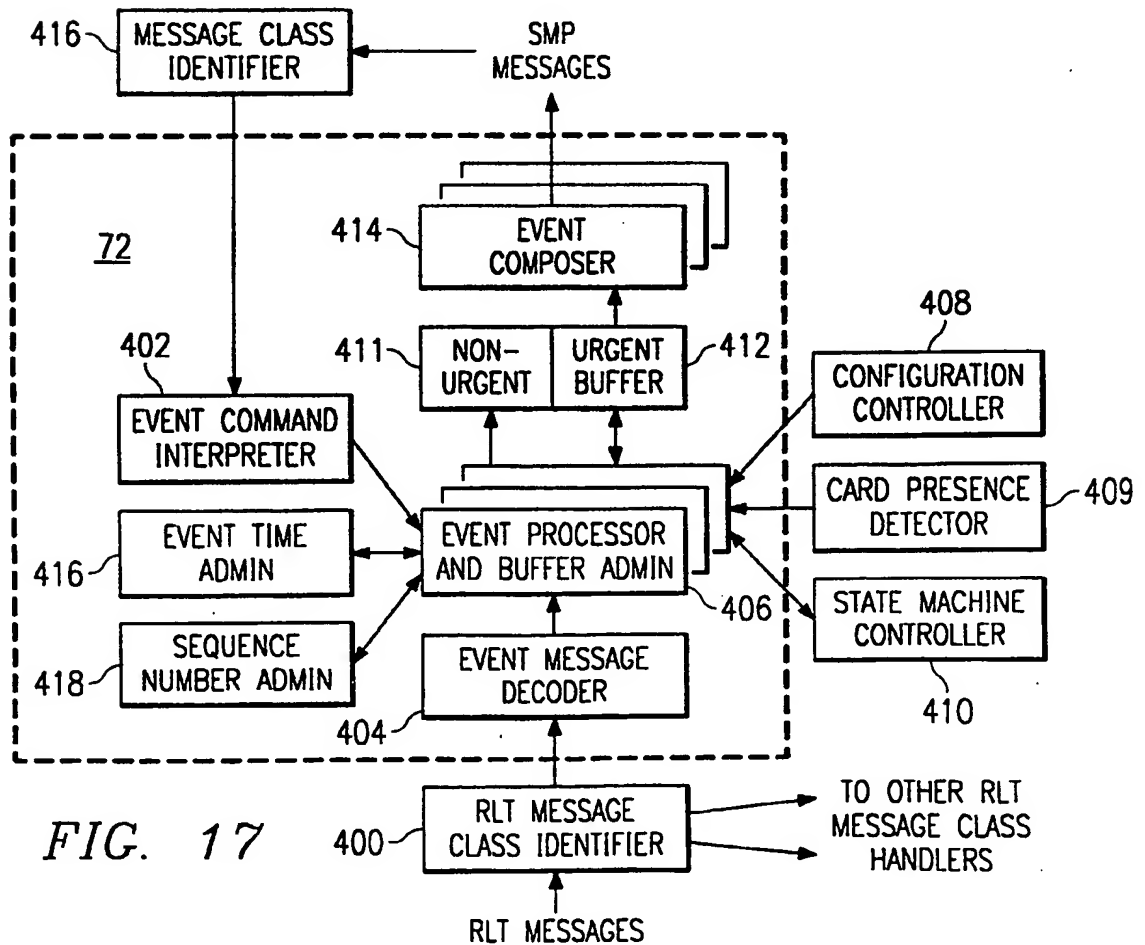
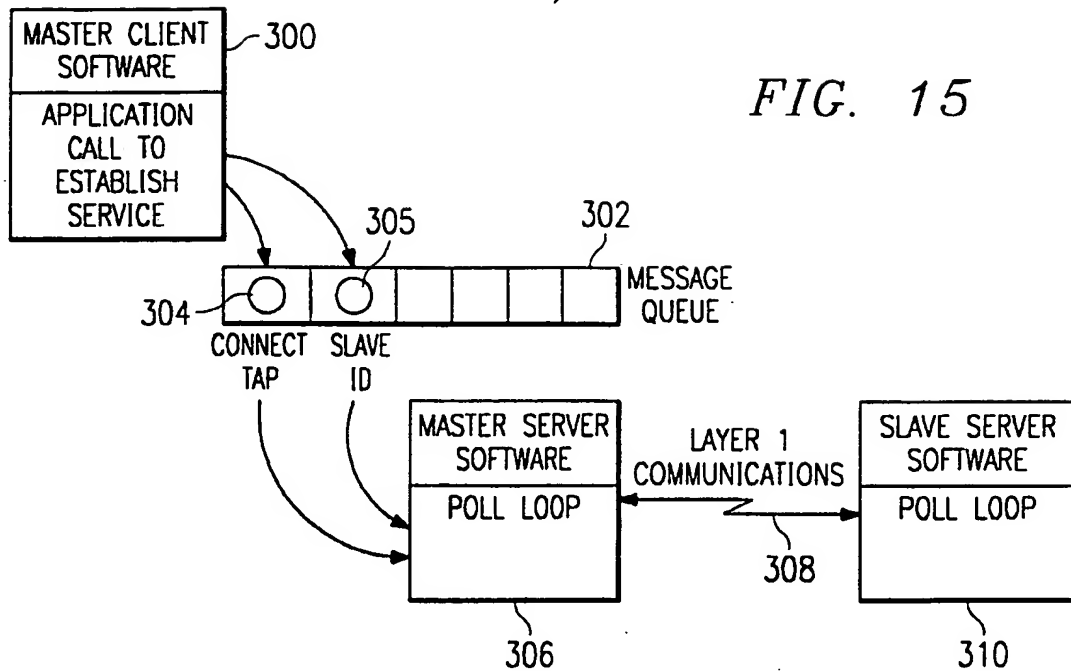


FIG. 14

11/14

FIG. 15





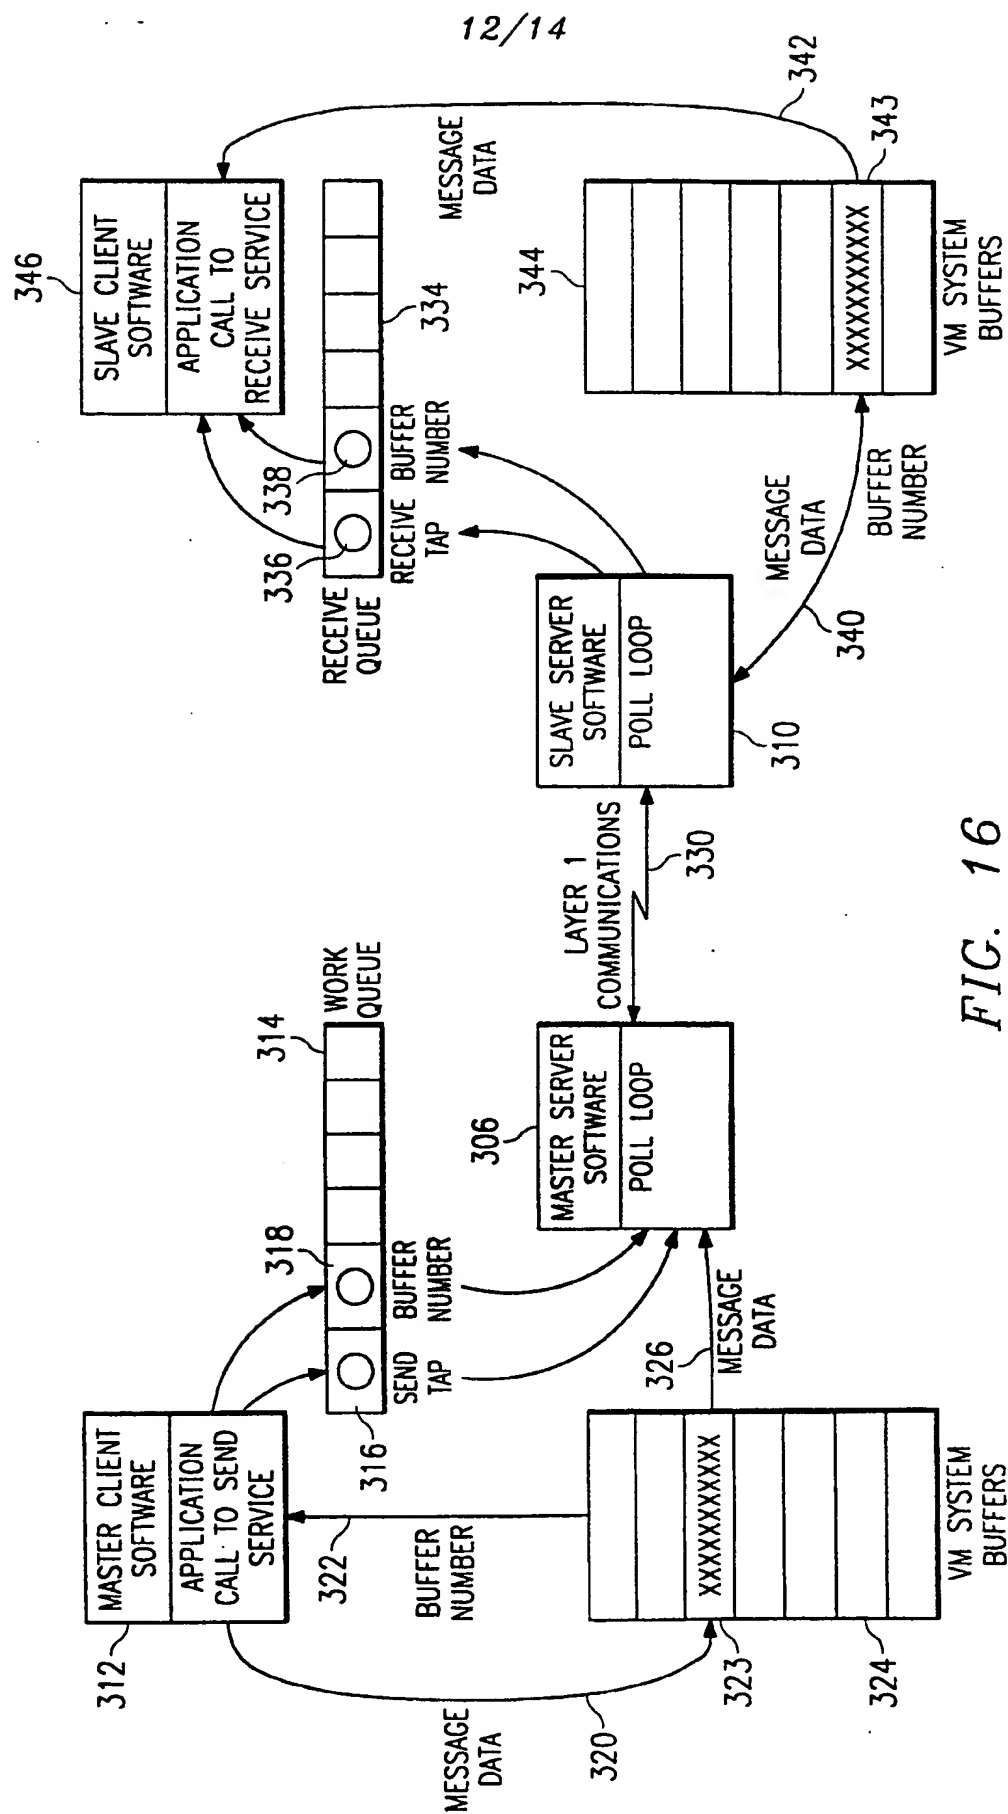


FIG. 16

13/14

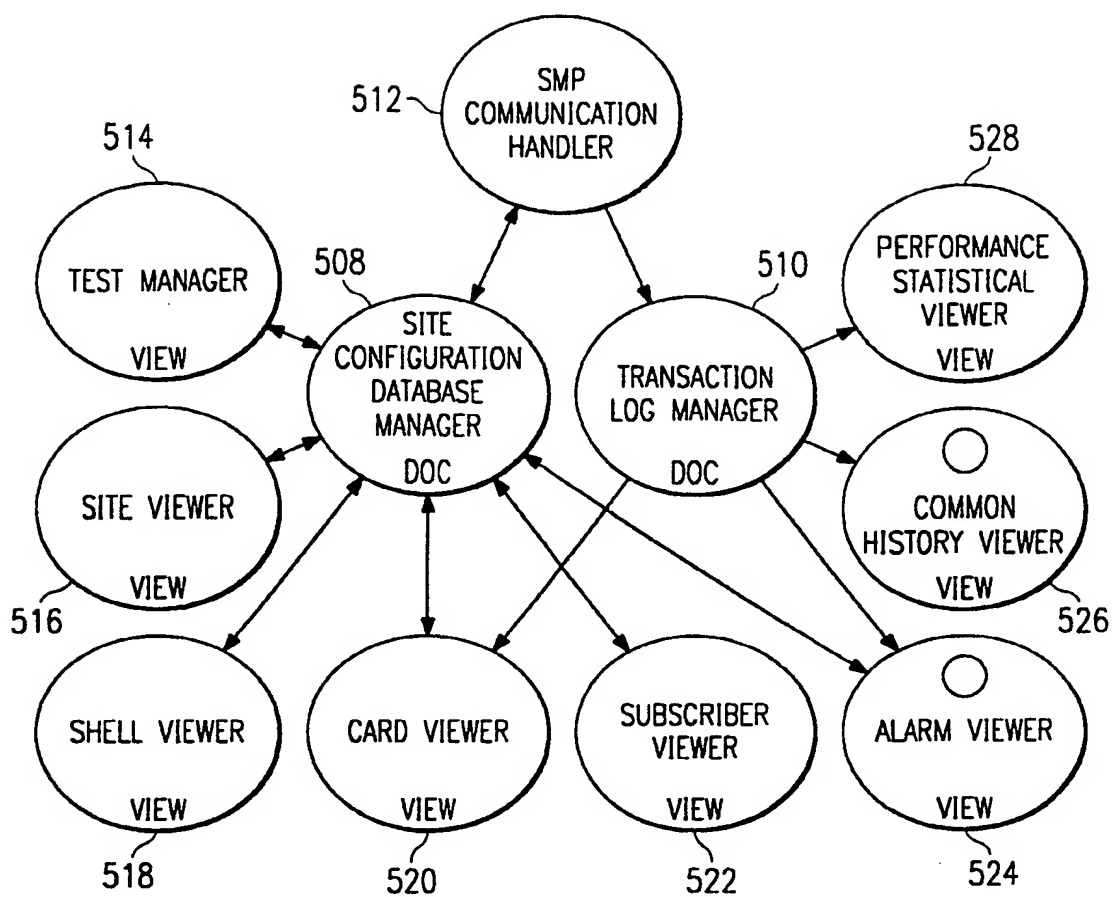


FIG. 18


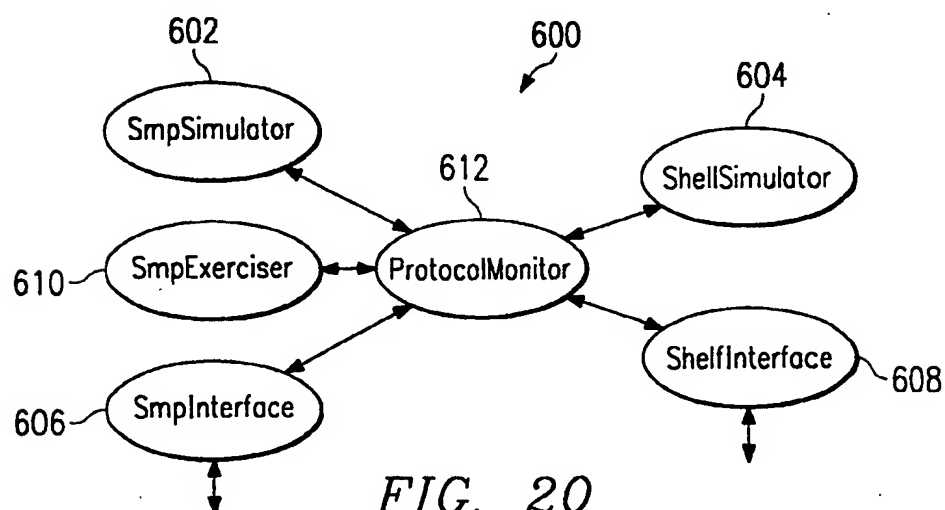


FIG. 20

14/14

FIG. 19

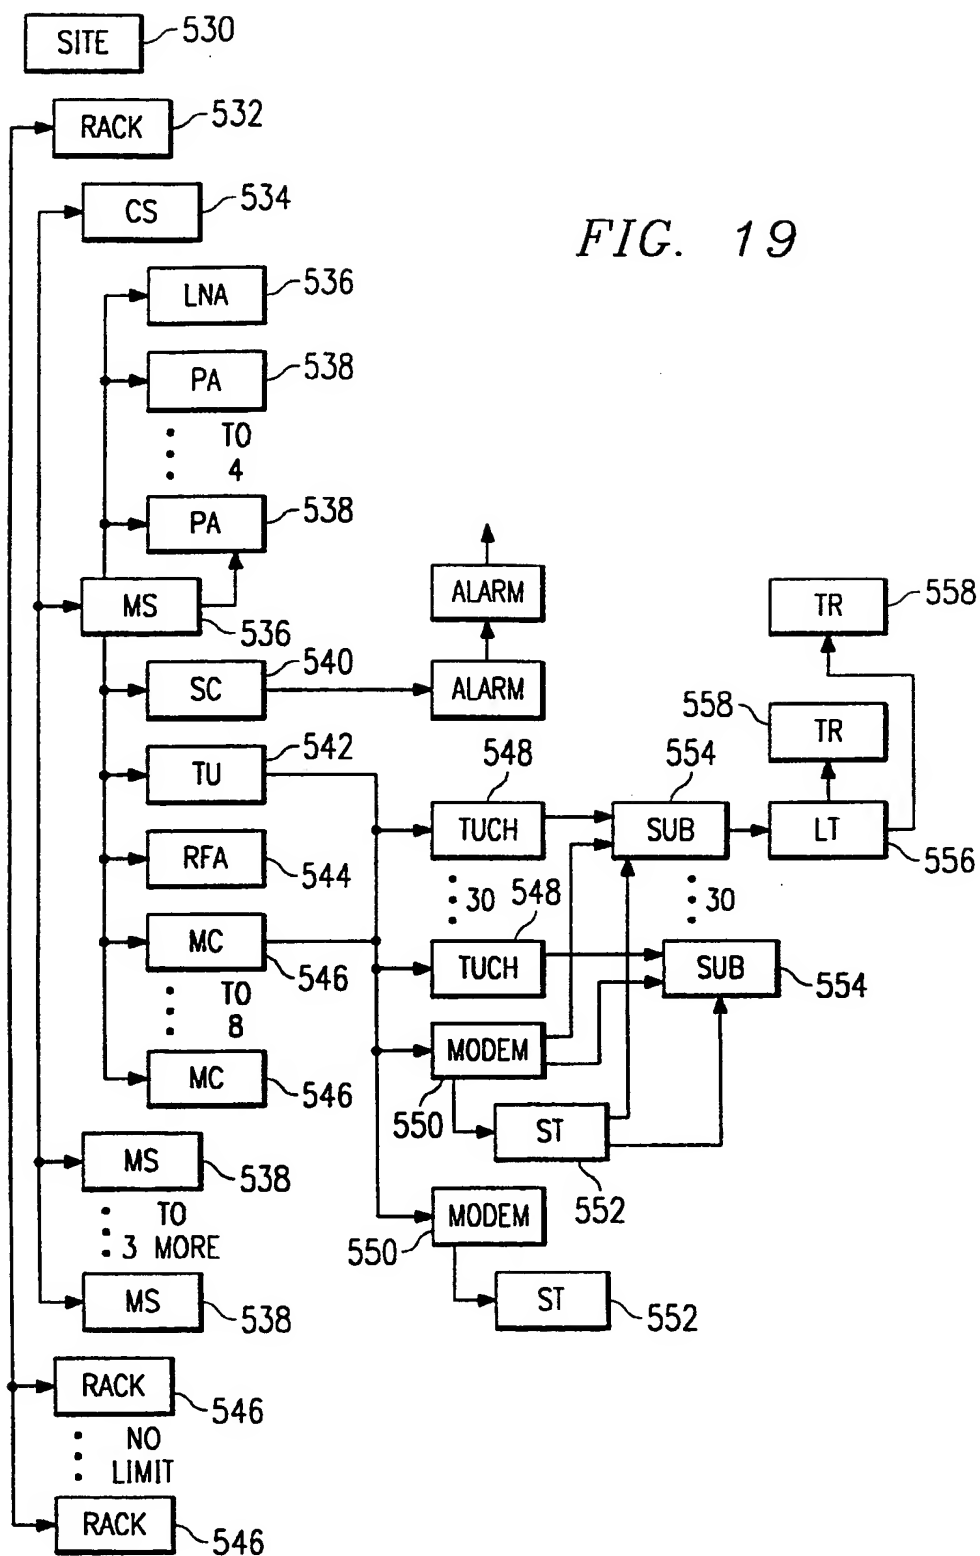

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 H04L29/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	A.S.TANENBAUM: "COMPUTER NETWORKS" 1988, PRENTICE HALL, ENGLEWOOD CLIFFS, US XP002015684 see paragraph 4.1.2 see paragraph 4.3 see paragraph 4.4	1,3,4, 8-23, 26-32
Y	---	6,7
Y	EP,A,0 411 497 (HITACHI) 6 February 1991 see column 8, line 14 - column 9, line 4 see abstract	6,7
A	US,A,4 482 951 (R.E.SWANEY ET AL) 13 November 1984 see column 6, line 42 - line 61 see column 3 see abstract	1-32
--- -/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
<b>* Special categories of cited documents :</b> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search  11 October 1996		Date of mailing of the international search report  29. 10. 96
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016		Authorized officer  Canosa Areste, C

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 688 035 (J.P.GRAY ET AL) 18 August 1987 see column 2, line 26 - line 53 see column 3, line 32 - column 4, line 23 see figure 1 ---	1-32
A	EP,A,0 310 360 (HEWLETT-PACKARD) 5 April 1989 see page 9, line 9 - page 11, line 20 see page 11, line 42 - page 13, line 53 ---	1-32
A	US,A,4 703 475 (E.E.DRETZKA ET AL) 27 October 1987 -----	

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-411497	06-02-91	JP-A- 3062255	18-03-91
		JP-A- 3091044	16-04-91
-----			
US-A-4482951	13-11-84	CA-A- 1179783	18-12-84
		DE-A- 3278950	29-09-88
		EP-A- 0079468	25-05-83
		JP-C- 1595377	27-12-90
		JP-B- 2017818	23-04-90
		JP-A- 58087614	25-05-83
-----			
US-A-4688035	18-08-87	CA-A- 1218466	24-02-87
		JP-C- 1689213	11-08-92
		JP-B- 3055065	22-08-91
		JP-A- 60125040	04-07-85
-----			
EP-A-310360	05-04-89	CA-A- 1306810	25-08-92
		DE-D- 3853118	30-03-95
		DE-T- 3853118	14-06-95
		JP-A- 1105644	24-04-89
		US-A- 5007051	09-04-91
-----			
US-A-4703475	27-10-87	CA-A- 1264365	09-01-90
		EP-A- 0224895	10-06-87
		JP-A- 62277829	02-12-87
-----			